# **Common Mode SCF Coils, SCF Series, High Inductance Type**



## **Overview**


The KEMET SCF coils are common mode chokes with a wide variety of characteristics. These toroidal coils are designed with nanocrystalline metal cores and are useful in various noise countermeasure fields.

# **Applications**

- Audio-visual equipment
- · Home appliances
- · Power supplies

## **Benefits**

- · Nanocrystalline metal core
- · Ultra-high inductance
- · Ultra-high permeability
- Operating temperature range from -40°C to +120°C
- UL 94 V-0 flame retardant rated cap





## **Part Number System**

SCF	27	-10	-1300	
Series	Dimension Code (See Dimensions)	Rated Current (A)	Inductance (mH) Minimum	Core Orientation
SCF	Blank 20 25	0x = x A xx = xx A	xx00 = xx mH xx0 = x.x mH	Blank = Vertical type H = Horizontal type
	27	Examples: 02 = 2 A 10 = 10 A	Examples: 1300 = 13 mH 650 = 6.5 mH	



## **Magnetic Permeability of Ferrite Material**

In order to achieve most efficient noise reduction, it is important to select the material according to the target frequency band. Depending on its magnetic permeability, a particular ferrite material or metal material will be effective in a certain frequency band. A schematic representation of the relationship between the magnetic permeability of each material and the corresponding effective band range is shown in Figure 1.

Ferrite materials with higher magnetic permeability are effective in the lower frequency range, while those with lower magnetic permeability are effective in the higher frequency range. Thus, Mn-Zn products are mainly used for reducing conduction noise, while Ni-Zn products are commonly used for radiation noise countermeasures. Metal materials, however, are effective throughout the broadband frequency range, in low as well as high frequencies.

The effective frequency range varies depending on core shape, size, and number of windings. This frequency dependence of the magnetic permeability as shown in the figure serves for reference purposes only. It should be tested on the actual device to determine its effectiveness.


S18H, S15H, 10H, 7H, 5H, 1400L, and 700L are KEMET's proprietary ferrite material names. Other materials are available upon request.

> **1400L**→ **─** 700L

> > 100 MHz

10 MHz

**Effective Frequency Range** 

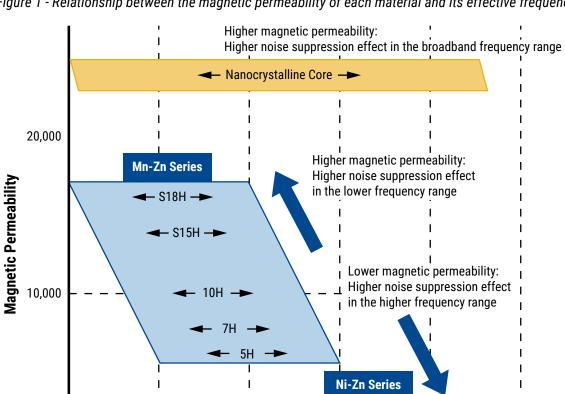

1 MHz

Figure 1 - Relationship between the magnetic permeability of each material and its effective frequency range

100 kHz

10 kHz

1 GHz



## **Dimensions - Millimeters**

Figure 1





Figure 2



Dimensions (mm)			Pin Pitch¹ (Reference)		Figure		
	OD (Maximum)	T (Maximum)	H (Maximum)	L	a	b	<b></b>
SCF-01-5000	15.0	12.0		15±2.0	5	12	Fig. 1
SCF-02-1300	15.0	12.0	-	15±2.0	5.5	11.5	Fig. 1
SCF-03-650	15.0	12.0	-	15±2.0	5	9	Fig. 1
SCF-03-650H	15.0	-	12.0	5±2.0	10	10	Fig. 2
SCF-05-060	15.0	11.0	-	5±1.5	5	9	Fig. 1
SCF-05-350	15.5	12.0	-	15±2.0	5	9	Fig. 1
SCF20-05-550	25.0	15.5	-	20±2.5	14	12	Fig. 1
SCF20-05-1100	25.0	15.5	-	20±2.5	14	12	Fig. 1
SCF25-06-2000	32.0	23.0	-	10±2.5	13	20	Fig. 1
SCF25-08-1300	32.0	23.0	-	10±2.5	13	20	Fig. 1
SCF27-10-1300	35.0	24.0	-	15±3.0	24	20	Fig. 1
SCF27-15-700	36.0	24.0	-	15±3.0	24	20	Fig. 1
SCF27-15-700H	35.0	-	25.0	10±2.0	22	21	Fig. 2

<sup>&</sup>lt;sup>1</sup> Pin pitch listed above for reference only. Values not guaranteed.

# **Environmental Compliance**

All KEMET AC line filters are RoHS Compliant.





## **Performance Characteristics**

Item	Performance Characteristics		
Rated Voltage	250 VAC/VDC		
Withstanding Voltage	2,400 VAC (2 seconds, between lines)		
Rated Current Range	1 – 15 A		
Rated Inductance Range	0.6 - 50.0 mH minimum		
Inductance Measurement Condition	10 kHz		
Thermal Class	E (120°C)		
Operating Temperature Range	-40°C to +120°C (include self temperature rise)		


# Table 1 - Ratings & Part Number Reference


Part Number	Rated Current (A)	Inductance (mH) Minimum	DC Resistance/ Line (mΩ) Maximum	Temperature Rise (K) Maximum	Wire Diameter (mm)	Weight (g) Approximate
SCF-01-5000 <sup>1</sup>	1	50.0	390.0	60	0.35	5.0
SCF-02-1300 <sup>1</sup>	2	13.0	115.0	50	0.45	5.0
SCF-03-6501	3	6.5	70.0	55	0.50	5.0
SCF-03-650H1	3	6.5	70.0	55	0.50	5.0
SCF-05-0601	5	0.6	18.0	55	0.50	3.3
SCF-05-3501	5	3.5	35.0	55	0.60	5.0
SCF20-05-550	5	5.5	28.0	50	0.80	11.4
SCF20-05-1100	5	11.0	39.0	70	0.80	13.5
SCF25-06-2000	6	20.0	26.0	45	1.10	41.5
SCF25-08-1300	8	13.0	18.0	50	1.20	41.0
SCF27-10-1300	10	13.0	15.0	55	1.30	47.0
SCF27-15-700	15	7.0	5.0	70	1.50	48.0
SCF27-15-700H	15	7.0	8.5	70	1.50	49.0


 $<sup>^{1}</sup>$  Insulation distance designed value of ≥ 2.6 mm.





## **Frequency Characteristics**



























# **Frequency Characteristics cont.**













## **Packaging**

Туре	Packaging Type	Pieces Per Box
SCF-01-5000		
SCF-02-1300		1,300
SCF-03-650		
SCF-03-650H		1,020
SCF-05-060		1,300
SCF-05-350		1,300
SCF20-05-550	Tray	400
SCF20-05-1100		400
SCF25-06-2000		100
SCF25-08-1300		
SCF27-10-1300		
SCF27-15-700		
SCF27-15-700H		150

## **Handling Precautions**

#### Precautions for product storage

AC Line Filters should be stored in normal working environments. While the chokes themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage.

KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Atmospheres should be free of chlorine and sulfur bearing compounds. Temperature fluctuations should be minimized to avoid condensation on the parts. Avoid storage near strong magnetic fields, as this might magnetize the product.

For optimized solderability, AC line filters stock should be used promptly and preferably within 6 months of receipt.

### Product temperature rise values

The values listed for temperature rise are the result of self-heating in wires when the rated current (commercial frequency) is applied.

When using the product, check and evaluate the value of the core temperature rise under actual operating conditions.



## **KEMET Electronics Corporation Sales Offices**

For a complete list of our global sales offices, please visit www.kemet.com/sales.

#### **Disclaimer**

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

When providing KEMET products and technologies contained herein to other countries, the customer must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the International Traffic in Arms Regulations (ITAR), the US Export Administration Regulations (EAR) and the Japan Foreign Exchange and Foreign Trade Act.