




SMD Auto X7R VW80808, Ceramic, 0.01 uF, 10%, 100 VDC, X7R, SMD, MLCC, Automotive Grade, 0805, 0.7 mm



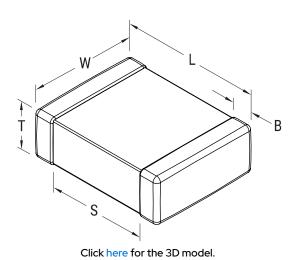

General Information		
Series	SMD Auto X7R VW80808	
Style	SMD Chip	
Description	SMD, MLCC, Automotive Grade	
Features	VW 80808 Specification Compliant	
RoHS	Yes	
Termination	Flexible Termination	
Failure Rate	N/A	
Qualifications	AEC-Q200	
AEC-Q200	Yes	
Typical Component Weight	13 mg	
Shelf Life	152 Weeks	

0.01 uF

10%

Dimensions	
Chip Size	0805
L	2mm +/-0.3mm
W	1.25mm +/-0.3mm
Т	0.78mm +/-0.20mm
S	0.7mm MIN
В	0.5mm +/-0.25mm

W	1.25mm +/-0.3mm
Т	0.78mm +/-0.20mm
S	0.7mm MIN
В	0.5mm +/-0.25mm
Packaging Specifications	

W	1.25mm +/-0.3mm	Voltage DC	100 VDC
Т	0.78mm +/-0.20mm	Dielectric Withstanding Voltage	250 VDC
S	0.7mm MIN	Temperature Range	-55/+125°C
В	0.5mm +/-0.25mm	Temp. Coefficient	X7R
		Capacitance Change with	15%, 1kHz 1.0Vrms
Packaging Specifications		Reference to +25°C and 0 VDC Applied (TCC)	
Packaging	T&R, 180mm, Plastic Tape	Dissipation Factor	2.5% 1 kHz 1.0Vrms
Packaging Quantity	4000	•	100.001
		Insulation Resistance	100 GOhms

**Specifications** 

Capacitance Tolerance

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 04/29/2025 © 2006 - 2025 YAGEO








SMD Auto X7R VW80808, Ceramic, 0.01 uF, 10%, 100 VDC, X7R, SMD, MLCC, Automotive Grade, 0805, 0.7 mm


## **Simulations**


For the complete simulation environment please visit K-SIM.

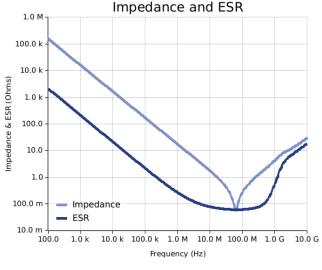


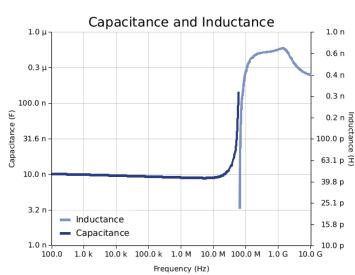

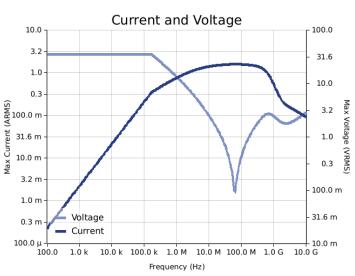

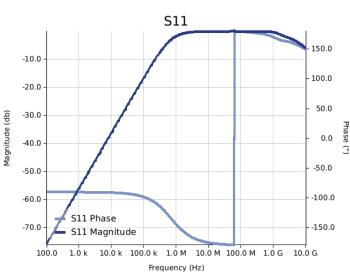

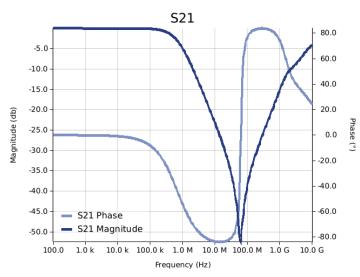

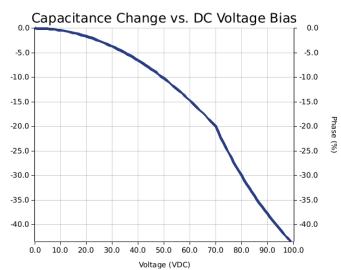


Generated 04/29/2025 © 2006 - 2025 YAGEO


Phase (%)



## C0805X103K1RAC3316

SMD Auto X7R VW80808, Ceramic, 0.01 uF, 10%, 100 VDC, X7R, SMD, MLCC, Automotive Grade, 0805, 0.7 mm

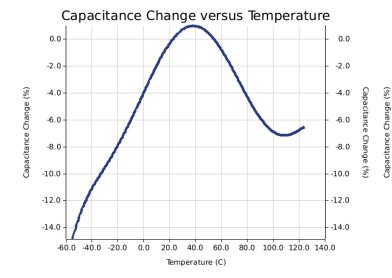

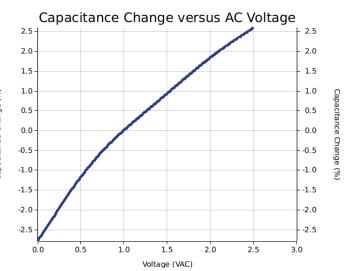

Generated 04/29/2025 © 2006 - 2025 YAGEO



## C0805X103K1RAC3316

SMD Auto X7R VW80808, Ceramic, 0.01 uF, 10%, 100 VDC, X7R, SMD, MLCC, Automotive Grade, 0805, 0.7 mm

## These are simulations.

This is not a specification!

The responses shown represent the typical response for each part type. Specific responses may vary, depending on manufacturing variation affects of all parameters involved, including the specified tolerances applied to capacitance and unspecified variations of ESR, ESL, and leakage resistance.

The responses shown do not represent a specified or implied maximum capability of the device for all applications.

- The ESR used for ripple "Ripple Current/Voltage vs. Frequency" plots is the ESR at ambient temperature.

- The ESR used for ripple Ripple Currenty votage vs. rrequency plots is unleast at an interact temperature.
  The ESR in the "Temperature Rise vs. Ripple Current" plots is adjusted to each incremental temperature rise before the power and ripple current is calculated.
  The effects shown herein are based on measured data from a multiple part sample of the parts in question.
  Ripple capability of this device will be factored by thermal resistance (Rth) created by circuit traces (addi affects of all parameters involved, including the specified tolerances applied to capacitance and unspecified variations of ESR, ESL, and leakage resistance.
  The peak voltages generated in the "Temperature Rise vs. Combined Ripple Currents" plot are calculated for each frequency and are not combined with voltages
- generated at any other harmonics.

   Please consult with the catalog or field applications engineer for maximum capability of the device in specific applications.

All product information and data (collectively, the "Information") are subject to change without notice.

KEMET K-SIM is designed to simulate behavior of components with respect to frequency, ambient temperature, and DC bias levels. The responses shown represent the typical response for each part type. Specific responses may vary, depending on manufacturing variation effects of all parameters involved, including the specified tolerances applied to capacitance and unspecified variations of ESR, ESL, and leakage resistance.

All Information given herein is believed to be accurate and reliable, but is presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

If you have any questions please contact K-SIM.

Generated 04/29/2025 © 2006 - 2025 YAGEO