# High Temperature 150°C, X8G Dielectric, 10 – 250 VDC (Commercial & Automotive Grade)









#### **Overview**

KEMET's X8G Class I dielectric features a 150°C maximum operating temperature, offering the latest in high temperature dielectric technology and reliability for extreme temperature applications and under the hood applications. X8G exhibits no change in capacitance with respect to voltage and boasts a minimal change in capacitance with reference to ambient temperature. It is a suitable replacement for higher capacitance and larger footprint devices that fail to offer capacitance stability. Capacitance change is limited to ±30ppm/°C from -55°C to +150°C.

Driven by the demand for a more robust and reliable component, X8G dielectric capacitors were developed for critical applications where reliability and capacitance

stability at higher operating temperatures are a concern. These capacitors are widely used in automotive for under the hood and harsh environment as well as general high temperature applications.


In addition to commercial grade, automotive grade devices are available and meet Automotive Electronics Council's AEC-Q200 qualification requirements. Also available with flexible termination technology which inhibits the transfer of board stress to the rigid ceramic body, therefore mitigating flex cracks which can result in low IR or short circuit failures.

#### **Benefits**

- -55°C to +150°C operating temperature range
- · Lead (Pb)-Free, RoHS and REACH compliant
- EIA 0402, 0603, 0805, 1206, 1210, 1812 & 2220 case sizes
- DC voltage ratings of 10V, 16V, 25V, 50V, 100V, 200V & 250V
- Capacitance offerings ranging from 0.5pF to 0.47µF
- Available capacitance tolerances of ±0.10pF, ±0.25pF, ±0.5pF, ±1%, ±2%, ±5%, ±10% & ±20%,
- · Extremely low ESR and ESL
- · High thermal stability
- · High ripple current capability
- No capacitance change with respect to applied rated DC voltage
- Non-polar device, minimizing installation concerns
- · Commercial and Automotive (AEC-Q200) grades available
- 100% pure matte tin-plated termination finish that allowing for excellent solderability.
- · Flexible Termination option available

## **Applications**

- · Decoupling
- Bypass
- Filtering
- · Under the hood
- · Transient voltage suppression
- Safety relevant circuits





### **Ordering Information**

С	1210	С	184	K	3	T	A	С	AUTO
Ceramic	Case Size (L" x W")	Specification/ Series <sup>1</sup>	Capacitance Code (pF)	Capacitance Tolerance	Rated Voltage (VDC)	Dielectric	Failure Rate/Design	Termination Finish <sup>2</sup>	Packaging/ Grade (C-Spec)
	0402 0603 0805 1206 1210 1812 2220	C = Standard X = Flexible Termination	Two significant digits and number of zeros	B = ±0.10 pF C = ±0.25 pF D = ±0.5 pF F = ±1% G = ±2% J = ±5% K = ±10% M = ±20%	8 = 10 4 = 16 3 = 25 5 = 50 1 = 100 2 = 200 A = 250	T = X8G	A = N/A	C = 100% Matte Sn L = SnPb (5% Pb minimum)	See "Packaging C-Spec Ordering Options Table"

<sup>&</sup>lt;sup>1</sup> The flexible termination option is not available on EIA 0402 case size product. "C" must be used in the 6th character position when ordering this case size.

## **Packaging C-Spec Ordering Options Table**

Packaging Type	Packaging/Grade Ordering Code (C-Spec)
Commerc	ial Grade <sup>1</sup>
Bulk Bag	Not Required (Blank)
7" Reel/Unmarked	TU
13" Reel/Unmarked	7411 (EIA 0603 and smaller case sizes) 7210 (EIA 0805 and larger case sizes)
Automotiv	ve Grade <sup>2</sup>
7" Reel	AUTO
13" Reel/Unmarked	AUTO7411 (EIA 0603 and smaller case sizes) AUTO7210 (EIA 0805 and larger case sizes)

<sup>&</sup>lt;sup>1</sup> Default packaging is "Bulk Bag". An ordering code C-Spec is not required for "Bulk Bag" packaging.

<sup>&</sup>lt;sup>2</sup> Additional termination finish options may be available. Contact KEMET for details.

<sup>&</sup>lt;sup>2</sup> SnPb termination finish option is not available on automotive grade product.

<sup>&</sup>lt;sup>1</sup> The terms "Marked" and "Unmarked" pertain to laser marking option of capacitors. All packaging options labeled as "Unmarked" will contain capacitors that have not been laser marked.

<sup>&</sup>lt;sup>2</sup> Reeling tape options (Paper or Plastic) are dependent on capacitor case size (L" x W") and thickness dimension. See "Chip Thickness/Tape & Reel Packaging Quantities" and "Tape & Reel Packaging Information".

<sup>&</sup>lt;sup>2</sup> For additional Information regarding "AUTO" C-Spec options, see "Automotive C-Spec Information".

<sup>&</sup>lt;sup>2</sup> All Automotive packaging C-Specs listed exclude the option to laser mark components. Please contact KEMET if you require a laser marked option. For more information see "Capacitor Marking".



#### **Automotive C-Spec Information**

KEMET automotive grade products meet or exceed the requirements outlined by the Automotive Electronics Council. Details regarding test methods and conditions are referenced in document AEC-Q200, Stress Test Qualification for Passive Components. These products are supported by a Product Change Notification (PCN) and Production Part Approval Process warrant (PPAP).

Automotive products offered through our distribution channel have been assigned an inclusive ordering code C-Spec, "AUTO." This C-Spec was developed in order to better serve small and medium-sized companies that prefer an automotive grade component without the requirement to submit a customer Source Controlled Drawing (SCD) or specification for review by a KEMET engineering specialist. This C-Spec is therefore not intended for use by KEMET OEM automotive customers and are not granted the same "privileges" as other automotive C-Specs. Customer PCN approval and PPAP request levels are limited (see details below.)

#### **Product Change Notification (PCN)**

The KEMET product change notification system is used to communicate primarily the following types of changes:

- Product/process changes that affect product form, fit, function, and/or reliability
- · Changes in manufacturing site
- Product obsolescence

KEMET Automotive	Customer Notifica	tion Due To:	Days Prior To
C-Spec	Process/Product change	Obsolescence*	Implementation
KEMET assigned <sup>1</sup>	Yes (with approval and sign off)	Yes	180 days minimum
AUT0	Yes (without approval)	Yes	90 days minimum

<sup>&</sup>lt;sup>1</sup> KEMET assigned C-Specs require the submittal of a customer SCD or customer specification for review. For additional information contact KEMET.

#### **Production Part Approval Process (PPAP)**

The purpose of the Production Part Approval Process is:

- To ensure that supplier can meet the manufacturability and quality requirements for the purchased parts.
- To provide the evidence that all customer engineering design records and specification requirements are properly understood and fulfilled by the manufacturing organization.
- To demonstrate that the established manufacturing process has the potential to produce the part.


KEMET Automotive			PPAP Level		
C-Spec	1	2	3	4	5
KEMET assigned <sup>1</sup>	•	•	•	•	•
AUT0			0		

<sup>&</sup>lt;sup>1</sup> KEMET assigned C-Specs require the submittal of a customer SCD or customer specification for review. For additional information contact KEMET.

- Part number specific PPAP available with customer information included.
- Product family PPAP only



# **Dimensions - Millimeters (Inches)**



#### **Standard Termination**

EIA Size Code	Metric Size Code	L Length	W Width	T Thickness	B Bandwidth	S Separation Minimum	Mounting Technique
0402	1005	1.00 (0.040) ±0.05 (0.002)	0.50 (0.020) ±0.05 (0.002)		0.30 (0.012) ±0.10 (0.004)	0.30 (0.012)	Solder Reflow Only
0603	1608	1.60 (0.063) ±0.15 (0.006)	0.80 (0.032) ±0.15 (0.006)		0.35 (0.014) ±0.15 (0.006)	0.50 (0.020)	
0805	2012	2.00 (0.079) ±0.20 (0.008)	1.25 (0.049) ±0.20 (0.008)		0.50 (0.02) ±0.25 (0.010)	0.70 (0.028)	Solder Wave or Solder Reflow
1206	3216	3.20 (0.126) ±0.20 (0.008)	1.60 (0.063) ±0.20 (0.008)	See Table 2 for Thickness	0.50 (0.02) ±0.25 (0.010)	1.50 (0.060)	
1210	3225	3.20 (0.126) ±0.20 (0.008)	2.50 (0.098) ±0.20 (0.008)		0.50 (0.02) ±0.25 (0.010)	1.50 (0.060)	
1812	4532	4.50 (0.177) ±0.30 (0.012)	3.20 (0.126) ±0.30 (0.012)		0.60 (0.024) ±0.35 (0.014)	2.30 (0.091)	Solder Reflow Only
2220	5650	5.70 (0.224) ±0.40 (0.016)	5.00 (0.197) ±0.40 (0.016)		0.60 (0.024) ±0.35 (0.014)	3.50 (0.138)	_

#### **Flexible Termination**

EIA Size Code	Metric Size Code	L Length	W Width	T Thickness	B Bandwidth	S Separation Minimum	Mounting Technique
0603	1608	1.60 (0.063) ±0.17 (0.007)	0.80 (0.032) ±0.15 (0.006)		0.45 (0.018) ±0.15 (0.006)	0.40 (0.016)	0-14
0805	2012	2.00 (0.079) ±0.30 (0.012)	1.25 (0.049) ±0.30 (0.012)		0.50 (0.02) ±0.25 (0.010)	0.60 (0.024)	Solder Wave or Solder Reflow
1206	3216	3.30 (0.130) ±0.40 (0.016)	1.60 (0.063) ±0.35(0.013)	See Table 2 for	0.60 (0.024) ±0.25 (0.010)	1.50 (0.060)	Solder Reliow
1210	3225	3.30 (0.130) ±0.40 (0.016)	2.60(0.102) ±0.30(0.012)	Thickness	0.60 (0.024) ±0.25 (0.010)	1.50 (0.060)	
1812	4532	4.50 (0.178) ±0.40 (0.016)	3.20 (0.126) ±0.30 (0.012)		0.70 (0.028) ±0.35 (0.014)	2.30 (0.091)	Solder Reflow Only
2220	5650	5.90 (0.232) ±0.75 (0.030)	5.00 (0.197) ±0.40 (0.016)		0.70 (0.028) ±0.35 (0.014)	3.50 (0.138)	



#### **Qualification/Certification**

Commercial grade products are subject to internal qualification. Details regarding test methods and conditions are referenced in Table 4, Performance & Reliability.

Automotive grade products meet or exceed the requirements outlined by the Automotive Electronics Council. Details regarding test methods and conditions are referenced in document AEC-Q200, Stress Test Qualification for Passive Components. For additional information regarding the Automotive Electronics Council and AEC-Q200, please visit their website at www.aecouncil.com.

### **Environmental Compliance**







Lead (Pb)-free, RoHS, and REACH compliant without exemptions (excluding SnPb termination finish option).



# Table 1A – Standard Termination Capacitance Range/Selection Waterfall (0402 – 1206 Case Sizes)

		Ca	ise	Si	70/	Se	rie	•			CC	)40	2C					CC	060	3C					CC	080	5C					C:	120	6C		
	Сар	00						1				î .												_												
Capacitance	Code		Vo	olta	ge C	ode	<del>-</del>	_	8	4	3	5	1	2	A	8	4	3	5	1	2	A	8	4	3	5	1	2	A	8	4	3	5	1	2	A
		R	ated	l Vol	ltag	e (\	/DC)		2	16	25	20	100	200	250	10	16	25	20	100	200	250	1	16	25	20	100	200	250	10	16	25	20	100	200	250
		Ca	paci	itan	ce T	ole	ranc	e															d Ch Thicl													
0.50 & 0.75 pF	508 & 758		C						ВВ	ВВ	BB	ВВ				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN								
0.75 pF	758		C						BB	BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN		DN	DN	DN	DN		ED	ED	ED	ED		ED
1.0 - 9.1 pF*	109 - 919*	B	C	F	G	J	K		BB BB	BB BB	BB BB	BB BB				CF CF	CF CF	CF CF	CF CF	CF CF	CF CF	CF CF	DN DN	DN DN	DN DN	DN DN	DN DN	DN DN	DN DN	EB EB	EB EB	EB EB	EB EB	EB EB	EB EB	EB EB
10 pF 11 pF	100 110			F		J			BB	BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
12 pF	120			F	_	J			BB	BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
13 pF	130	l		ļ.	1 -	J		- 1		BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
15 pF	150	i		F		J				BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
16 pF	160	i		F	G	J	1 1		BB	BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
18 pF	180	i		F		J				ВВ	ВВ	BB				CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
20 pF	200			F	G	J		_	_	ВВ	ВВ	ВВ				CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
22 pF	220			F	G	J				ВВ	ВВ	ВВ				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
24 pF	240			F	G	J	K	И	ВВ	ВВ	ВВ	ВВ				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
27 pF	270			F	G	J			ВВ	ВВ	ВВ	ВВ				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
30 pF	300			F	_	J	_		ВВ	ВВ	ВВ	ВВ				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
33 pF	330			F	1 -	J			BB	BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
36 pF	360			F	1 -	J				BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
39 pF	390			F	1 -	J				BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
43 pF	430			F	1 -	J				BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
47 pF	470			F	-	J	_		BB	BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
51 pF	510			F	1 -	J			BB BB	BB BB	BB	BB				CF	CF CF	CF CF	CF CF	CF CF	CF CF	CF CF	DN	DN DN	DN	DN	DN	DN DN	DN	EB EB	EB EB	EB EB	EB EB	EB EB	EB EB	EB EB
56 pF 62 pF	560 620				G	J				ВВ	BB BB	BB BB				CF CF	CF	CF	CF	CF	CF	CF	DN DN	DN	DN DN	DN DN	DN DN	DN	DN DN	EB	EB	EB	EB	EB	EB	EB
68 pF	680			F		J				BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
75 pF	750			F		J				BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN		DN		DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
82 pF	820			F	_	J				BB	BB	BB				CF	CF	CF	CF.	CF	CF	CF	DN	DN	DN		DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
91 pF	910	i		F		J		- 1	BB	ВВ	BB	BB				CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
100 pF	101	i		F	G	J		- 1		ВВ	ВВ	ВВ	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
110 pF	111	i		F	G	J		м	вв	ВВ	ВВ	ВВ	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
120 pF	121	i		F	G	J	K	М	ВВ	ВВ	ВВ	ВВ	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
130 pF	131			F	G	J	K	М	ВВ	ВВ	BB	BB	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
150 pF	151	i		F	G	J	K	М	ВВ	ВВ	ВВ	BB	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
160 pF	161			F	G	J	K	М	ВВ	ВВ	ВВ	ВВ	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
180 pF	181			F	G	J	K	И	ВВ	ВВ	ВВ	BB	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
200 pF	201			F	G	J	K	М	ВВ	ВВ	BB	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
220 pF	221			F	G	J	K	И	ВВ	BB	BB	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
240 pF	241			F	G	J	K	И	ВВ	BB	BB	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
270 pF	271			F	1 -	J		- 1	ВВ	ВВ	ВВ	ВВ	BB	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
300 pF	301			F	1 -	J		- 1	ВВ	ВВ	ВВ	ВВ	BB	BD	BD	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
330 pF	331			F	-	J	_	_		ВВ	ВВ	ВВ	ВВ	BD	BD	CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
360 pF	361			F	1 -	J	K				ВВ	BB	BB			CF	CF	CF	CF	CF	CF	CF			DN			DN		EB	EB	EB	EB	EB	EB	EB
390 pF	391			F	0	J					ВВ	BB	ВВ			CF	CF	CF	CF	CF	CF		DN	DN	DN	DN	DN		DN	EB	EB	EB	EB	EB	EB	EB
430 pF	431			F	G	J				ВВ	ВВ	ВВ	BB			CF	CF	CF	CF	CF	CF	CF		DN	DN	DN	DN		DN	EB	EB	EB	EB	EB	EB	EB
470 pF	471			F	G	J					ВВ	BB	ВВ			CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DP	DP	EB	EB	EB	EB	EB	EB	EB
510 pF	511			F	_	J				ВВ	ВВ	BB	BB			CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
560 pF	561			F	G	J	K	- 1		BB	BB	BB	BB			CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DN		DN	EB	EB	EB	EB	EB	EB	EB
620 pF	621			F	1 -	J				BB	BB	BB	BB			CF	CF	CF	CF	CF	CF	CF	DN		DN	DN		DN	DN	EB	EB	EB	EB	EB	EB	EB
680 pF	681			F		J	K	- 1		BB	BB	BB	BB			CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	1	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
750 pF	751			F	1 -	J				BB	BB	BB	BB			CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	1	DN	DN	DN	EB	EB	EB	EB	EB	EB	EB
820 pF	821			F	-	J				BB	BB	BB				CF	CF	CF	CF	CF	CF	CF	_	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	EB	EB	_
910 pF	911			F		J	K		BB	BB	BB	BB	BB			CF	CF	CF	CF	CF	CF	CF	DN	DN	DN	DN	DP	DP	DP	EB	EB	EB	EB	EB	EB	EB
1,000 pF	102			F		J	K			BB	BB	BB	BB			CF	CF	CF	CF	CF	CF	CF		DN	DN	DN	DP	DP	DP	EB	EB	EB	EB	EB	EE	
1,100 pF	112			F		J	K			BB	BB	BB				CF	CF	CF	CF	CF	CH	CH	DN	DN	DN	DN	DP	DN	DN	EB	EB	EB	EB	EB	EB	EB
1,200 pF	122	R	ated	_	G Itag			_	5 BB	9 <b>1</b>	25 gg	BB <b>0</b> 2	100	200	250	CF 2	CF 9	CF <b>22</b>	CF 02	CF 001	CH 002	520 단	DN	9 DN	25 NG	DN 20	00 DP	200 ND	250 NG	EB C	<b>EB</b>	25 EB	EB <b>20</b>	00L	EB 002	250 田
Capacitance	Cap	Ë						$\dagger$	8	4	3	5	1	2	A A	8	4	3	5	1	2	A	8	4	3	5	1	2	A	8	4	3	5	1	2	A
Japavitanoe	Code	-	Voltage Code  Case Size/Series					+		•		0402		_		Ť			060		_		Ť	<u>.</u>		080		<u>-</u>		Ť			120		_	
		∟`	·uot	e Size/Series																			Щ										0			



# Table 1A – Standard Termination Capacitance Range/Selection Waterfall (0402 – 1206 Case Sizes) cont.

		Case Size/Series			00	1404	20					00	160	20					00	080	EC					C	120	60		
	0	Case Size/Series			U	) <b>4</b> 0:	26					U	)60	<b>3</b> 6					U	JOU	<b>3</b> 6					U	120	<b>D</b> C		
Capacitance	Cap Code	Voltage Code	8	4	3	5	1	2	A	8	4	3	5	1	2	A	8	4	3	5	1	2	A	8	4	3	5	1	2	A
	Coue	Rated Voltage (VDC)	10	16	25	50	100	200	250	10	16	25	50	100	200	250	10	16	25	50	100	200	250	10	16	25	20	100	200	250
		Capacitance Tolerance																	hick											
1,300 pF	132	F G J K M	BB	ВВ	ВВ	ВВ				CF	CF	CF	CF	CF	CH			DP	DP	DP	DP		DN	EB	EB	EB	EB	EC	EC	EC
1,500 pF	152	F G J K M		BB	BB	BB				CF	CF	CF	CF	CF	CH		DP	DP	DP	DP	DP	DN	DN	EB	EB	EB	EB	ED	EC	EC
1,600 pF	162	F G J K M		BB	BB	DD				CF	CF	CF	CF	CF	CH	CH	DP	DP	DP	DP	DP	DN	DN	EB	EB	EB	EB	ED	ED	ED
1,800 pF	182	F G J K M		BB	BB					CF	CF	CF	CF	CF	CH	1	DP	DP	DP	DP	DP	DN	DN	EB	EB	EB	EB	ED	ED	ED
2,000 pF	202	F G J K M		ВВ	BB					CF	CF	CF	CF	CF	СН	1 -	DN	DN	DN	DN	DN	DN	DN	EB	EB	EB	EB	ED	ED	ED
2,000 pF 2,200 pF	202			ВВ	BB					CF	CF	CF	CF	CF		CH	DN	DN	DN	1	DN	DN	DN	EB	EB	EB	EB	EE	EE	ED
	242		DD	DD	DD					CF	CF	CF	CF	CF	СП	CH	DN	DN	DN	DN		DN	DN	EB	EB	EB	EB	EC	EC	EC
2,400 pF																					DN							1 -	1	
2,700 pF	272	F G J K M								CF	CF	CF	CF	CF			DN	DN		DN	DN	DN	DN	EB	EB	EB	EB	EC	EC	EC
3,000 pF	302	F G J K M								CF	CF	CF	CF	CF			DN	DN	DN	DN	DN	DN	DN	EC	EC	EC	EC	EC	EB	EB
3,300 pF	332	F G J K M								CF	CF	CF	CF	CF			DN	DN	DN	DN	DN	DN	DN	EC	EC	EC	EC	EE	EB	EB
3,600 pF	362	F G J K M								CF	CF	CF	CF	CF			DN	DN	DN	DN	DN	DP	DP	EC	EC	EC	EC	EE	EB	EB
3,900 pF	392	F G J K M								CF	CF	CF	CF	CF			DN	DN	DN	DN	DN	DP	DP	EC	EC	EC	EC	EF	EB	EB
4,300 pF	432	F G J K M								CF	CF	CF	CF	CF			DN	DN	DN	DN	DN	DP	DP	EC	EC	EC	EC	EC	EB	EB
4,700 pF	472	F G J K M								CF	CF	CF	CF	CF			DN	DN		DN	DN	DP	DP	EC	EC	EC	EC	EC	EB	EB
5,100 pF	512	F G J K M								CF	CF	CF	CF				DN	DN	DN	DN	DN	DP	DP	ED	ED	ED	ED	ED	EB	EB
5,600 pF	562	F   G   J   K   M								CF	CF	CF	CF				DN	DN	DN	DN	DN	DP	DP	ED	ED	ED	ED	ED	EB	EB
6,200 pF	622	F G J K M								CF	CF	CF	CF				DN	DN	DN	DN	DN	DG	DG	EB	EB	EB	EB	EB	EB	EB
6,800 pF	682	F G J K M								CF	CF	CF	CF				DN	DN	DN	DN	DN	DG	DG	EB	EB	EB	EB	EB	EB	EB
7,500 pF	752	F G J K M								CF	CF	CF					DN	DN	DN	DN	DN	DG	DG	EB	EB	EB	EB	EB	EB	EB
8,200 pF	822	F G J K M								CF	CF	CF					DN	DN	DN	DN	DN	DG	DG	EB	EB	EB	EB	EB	EC	EC
9,100 pF	912	F G J K M								CF	CF	CF					DN	DN	DN	DN	DN			EB	EB	EB	EB	EB	EC	EC
10,000 pF	103	F G J K M								CF	CF	CF					DN	DN	DN	DN	DP			EВ	EB	EB	EB	EB	EC	EC
12,000 pF	123	F G J K M	i							CF	CF	CF					DN	DN	DN	DN	DE			ЕВ	EB	EB	EB	EB	ED	ED
15,000 pF	153	F G J K M								CF	CF	CF					DN	DN	DN	DP	DG			EB	EB	EB	EB	EB	EF	EF
18,000 pF	183	F G J K M								۱ °	0.	0.					DN	DN	DN	DP	0			EB	EB	EB	EB	EB	EH	EH.
22,000 pF	223	F G J K M								l							DP	DP	DP	DF				EB	EB	EB	EB	EC	EH	
27,000 pF	273	F G J K M															DF	DF	DF	DI.				EB	EB	EB	EB	EE	E11	E11
33,000 pF	333	F G J K M															DG	DG	DG					EB	EB	EB	EB	EE		
39,000 pF	393	F G J K M															DG	DG	DG					EC	EC	EC	EE	EH		
		F G J K M															-	DG	DG					EC	EC	EC	EE	EH		
47,000 pF	473																DG	של	DG							1	EF	EH		
56,000 pF	563	F G J K M																						ED	ED	ED				
68,000 pF	683	F G J K M															1							EF	EF	EF	EH			
82,000 pF	823	F G J K M															1							EH	EH		EH			
100,000 pF	104	F G J K M			10	_	0	-	-	<del> -</del>	٠,	10	_	0	-	-	┝		10	_	0	-	0	EH	EH	_	_	-	-	-
	Сар	Rated Voltage (VDC)	2	16	25	20	100	200	250	2	92	25	20	100	200	250	2	16	25	20	100	200	250	2	9	25	20	100	200	250
Capacitance	Code	Voltage Code	8	4	3	5	1	2	A	8	4	3	5	1	2	Α	8	4	3	5	1	2	A	8	4	3	5	1	2	A
		Case Size/Series			C	0402	2C					С	0603	3C					С	080	5C					С	1206	iC_		



# Table 1B - Standard Termination Capacitance Range/Selection Waterfall (1210 - 2220 Case Sizes)

			_				_			1													
			Ca	se S	Siz	e/\$	Sei	ies				C	1210	C				C18	12C		C	2220	C
Capacitance	Cap			Vol	tag	e Co	ode			8	4	3	5	1	2	Α	5	1	2	Α	5	1	2
	Code		Ra	ated \	Volt	age	(VI	OC)		2	16	25	20	100	200	250	20	100	200	250	20	100	200
		Г	Car	acit	anc	e To	lera	nce				Pro		Avai	labili	ty and		Thi	cknes	s Co			.,
1.0 - 9.1 pF*	109 - 919*	В	C	D	uo					FB	FB	FB	FB	ble 2	FB FB	Chip 1	hick	ness	<u>Dime</u>	nsion	S		
1.0 - 9.1 pF	109-919	0			F	G	J	K	М	FB													
11 pF	110				F	G	J	K	М	FB													
12 pF 13 pF	120 130				F F	G G	J	K	M	FB FB													
15 pF	150				F	G	J	K	M	FB													
16 pF	160	İ			F	G	J	K	М	FB													
18 pF	180				F	G	J	K	М	FB													
20 pF 22 pF	200 220				F F	G G	J	K	M	FB FB													
24 pF	240				F	G	J	K	M	FB													
27 pF	270				F	G	J	K	М	FB													
30 pF 33 pF	300 330				F F	G G	J	K	M	FB FB													
36 pF	360				F	G	J	K	M	FB													
39 pF	390	Г		П	F	G	J	K	М	FB													
43 pF	430				F	G	J	K	M	FB													
47 pF 51 pF	470 510				F F	G G	J	K	M M	FB FB													
56 pF	560	İ			F	G	J	K	М	FB													
62 pF	620				F	G	J	K	М	FB													
68 pF 75 pF	680 750				F F	G G	J	K	M	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB							
82 pF	820				F	G	J	K	М	FB													
91 pF	910				F	G	J	K	М	FB													
100 pF	101				F	G	J	K	М	FB													
110 pF 120 pF	111 121				F F	G G	J	K	M M	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB							
130 pF	131				F	G	J	K	M	FB													
150 pF	151				F	G	J	K	М	FB													
160 pF	161				F	G	J	K	М	FB													
180 pF 200 pF	181 201				F F	G G	J	K	M	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB							
220 pF	221				F	G	J	K	M	FB													
240 pF	241				F	G	J	K	М	FB													
270 pF	271				F	G	J	K	М	FB													
300 pF 330 pF	301 331				F F	G G	J	K	M	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB							
360 pF	361				F	G	J	K	M	FB													
390 pF	391				F	G	J	K	М	FB													
430 pF	431				F	G	J	K	М	FB													
470 pF 510 pF	471 511				F F	G G	J	K	M	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB	GB GB	GB GB	GB GB	GB GB			
560 pF	561				F	G	J	K	M	FB	GB	GB	GB	GB									
620 pF	621				F	G	J	K	М	FB	GB	GB	GB	GB									
680 pF	681				F	G	J	K	М	FB	GB	GB	GB	GB									
750 pF 820 pF	751 821				F F	G G	J	K	M	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB	FB FB	GB GB	GB GB	GB GB	GB GB			
910 pF	911				F	G	J	K	М	FB	GB	GB	GB	GB									
1,000 pF	102				F	G	J	K	М	FB	GB	GB	GB	GB									
1,100 pF	112				F	G	J	K	М	FB	GB	GB	GB	GB									
1,200 pF 1,300 pF	122 132				F F	G G	J	K	M	FB FB	FB FB	FB FB	FB FB	FB FB	FB FC	FB FC	GB GB	GB GB	GB GB	GB GB			
1,500 pF	152				F	G	J	K	М	FB	FB	FB	FB	FB	FE	FE	GB	GB	GB	GB			
			Ra	ated \	Volt	-	(VI	_		2	9	25	20	9	200	250	20	9	200	250	20	100	200
Capacitance	Cap			Vol	tag	e Co	ode			8	4	3	5	1	2	A	5	1	2	A	5	1	2
	Code	$\vdash$		ase				PS.		Ė			1210				Ė		12C		_	2220	
	<u> </u>			436	J12	G/ J	CII						, 12 10	<u> </u>				<u> </u>	120		<u> </u>		



# Table 1B - Standard Termination Capacitance Range/Selection Waterfall (1210 - 2220 Case Sizes) cont.

						_																
			Case	Siz	ze/\$	Sei	ies	•			C	1210	C				C18	12C		C	2220	C
Capacitance	Cap Code		V	oltag	e Co	ode			8	4	3	5	1	2	A	5	1	2	A	5	1	2
	Coue		Rated	Vol	tage	(VI	OC)		10	16	25	50	100	200	250	20	100	200	250	50	100	200
			Capaci	tanc	e To	lera	nce										Thio					
1,600 pF	162			F	G	J	K	М	FB	FB	FB	FB	FB	FE	FE	GB	GB	GB	GB	Ĭ		
1,800 pF	182			F	G	J	K	М	FB	FB	FB	FB	FB	FE	FE	GB	GB	GB	GB			
2,000 pF	202	l		F	G	J	K	М	FB	FB	FB	FB	FC	FE	FE	GB	GB	GB	GB	l		
2,200 pF	222	l		F	G	J	K	М	FB	FB	FB	FB	FC	FG	FG	GB	GB	GB	GB	l		
2,400 pF	242	İ		F	G	J	K	М	FB	FB	FB	FB	FC	FC	FC	İ				İ		
2,700 pF	272	İ		F	G	J	K	М	FB	FB	FB	FB	FC	FC	FC	GB	GB	GB	GB	İ		
3,000 pF	302	İ		F	G	J	K	М	FB	FB	FB	FB	FC	FF	FF							
3,300 pF	332			F	G	J	K	М	FB	FB	FB	FB	FF	FF	FF	GB	GB	GB	GB			
3,600 pF	362			F	G	J	K	М	FB	FB	FB	FB	FF	FF	FF							
3,900 pF	392			F	G	J	K	M	FB	FB	FB	FB	FF	FF	FF	GB	GB	GB	GB			
4,300 pF	432			F	G	J	K	M	FB	FB	FB	FB	FF	FF	FF		O.D.	OD.	O.D.			
4,700 pF	472			F	G	J	K	M	FF	FF	FF	FF	FG	FG	FG	GB	GB	GD	GD			
5,100 pF	512	l		F	G	J	K	М	FB	FB	FB	FB	FG	FG	FG	05	OB	OD.	OD.	l		
5,600 pF	562			F	G	J	K	M	FB	FB	FB	FB	FG	FG	FG	GB	GB	GH	GH	ł		
6,200 pF	622			F	G	J	K	M	FB	FB	FB	FB	FG	FB	FB	GB	GD	GII	GII			
	682			F	G	J	K	M	FB	FB	FB	FB	FG	FB	FB	GB	GB	GJ	GJ	JE	JE	JB
6,800 pF				-	G	-		***			FC	FC	FC	FB	FB	GB	GB	GJ	GJ	JE	JE	JB
7,500 pF	752			F		J	K	М	FC	FC						٥٦	011	0.0	0.0			
8,200 pF	822			F	G	J	K	М	FC	FC	FC	FC	FC	FB	FB	GB	GH	GB	GB	JE	JE	JB
9,100 pF	912			F	G	J	K	М	FE	FE	FE	FE	FE	FB	FB							
10,000 pF	103			F	G	J	K	М	FF	FF	FF	FF	FF	FB	FB	GB	GH	GB	GB	JE	JE	JB
12,000 pF	123			F	G	J	K	M	FB	FB	FB	FB	FB	FB	FB	GB	GG	GB	GB	JE	JE	JB
15,000 pF	153			F	G	J	K	М	FB	FB	FB	FB	FB	FC	FC	GB	GB	GB	GB	JE	JE	JB
18,000 pF	183			F	G	J	K	М	FB	FB	FB	FB	FB	FC	FC	GB	GB	GB	GB	JE	JE	JB
22,000 pF	223			F	G	J	K	M	FB	FB	FB	FB	FB	FF	FF	GB	GB	GB	GB	JE	JB	JB
27,000 pF	273			F	G	J	K	М	FB	FB	FB	FB	FB	FG	FG	GB	GB	GB	GB	JE	JB	JB
33,000 pF	333			F	G	J	K	М	FB	FB	FB	FB	FB	FH	FH	GB	GB	GB	GB	JB	JB	JB
39,000 pF	393	ļ		F	G	J	K	M	FB	FB	FB	FB	FE	FH	FH	GB	GB	GB	GB	JB	JB	JB
47,000 pF	473			F	G	J	K	M	FB	FB	FB	FB	FE	FJ	FJ	GB	GB	GD	GD	JB	JB	JB
56,000 pF	563			F	G	J	K	M	FB	FB	FB	FB	FF			GB	GB	GD	GD	JB	JB	JB
68,000 pF	683			F	G	J	K	M	FB	FB	FB	FC	FG			GB	GB	GK	GK	JB	JB	JB
82,000 pF	823			F	G	J	K	M	FC	FC	FC	FF	FH			GB	GB	GM	GM	JB	JB	JB
100,000 pF	104			F	G	J	K	М	FE	FE	FE	FG	FM			GB	GD	GM	GM	JB	JB	JD
120,000 pF	124	l		F	G	J	K	М	FG	FG	FG	FH				GB	GH			JB	JB	JD
150,000 pF	154	l		F	G	J	K	М	FH	FH	FH	FM				GD	GN			JB	JB	JG
180,000 pF	184	İ		F	G	J	K	М	FJ	FJ	FJ					GH				JB	JD	JG
220,000 pF	224	l		F	G	J	K	М	İ							GK				JВ	JD	JL
270,000 pF	274	İ		F	G	J	K	М	l .							l				JB	JF	
330,000 pF	334			F	G	J	K	М												JD	JG	
390,000 pF	394			F	G	J	K	М	l											JG		
470,000 pF	474			F	G	J	K	М												JG		
			Rated	Vol	tage	(VI			2	9	25	20	100	200	250	20	9	200	250	20	10	200
Capacitance	Cap Code		V	oltag	e Co	ode			8	4	3	5	1	2	A	5	1	2	A	5	1	2
	Coue		Case	e Siz	ze/S	eri	es				С	1210	С				C18	12C		С	2220	С



# **Table 1C – Flexible Termination Capacitance Range/Selection Waterfall** (0603 - 1206 Case Sizes)

			Гэс	0.2	Si <sub>7</sub>	· 0/9	Ser	ios					060	3C					r	080	5C					ſ	1206	ir		
	Cap	· ·	Ua:					163						T						ı										
Capacitance	Code	L	_		ltag					8	4	3	5	1	2	A	8	4	3	5	1	2	A	8	4	3	5	1	2	A
		L	Ra	ted	Volt	age	(VE	)C)		10	16	25	20	100	200	250	2	 ∕ailab	72	2 2	2 hin T	200	250		5	25	20	100	200	250
			Сар	acit	anc	е То	lera	nce	:									e 2 fo							:5					
0.50 & 0.75 pF	508 & 758	В	C	D D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR DR	DR DR	DR	DR	DR	DR DR							
0.75 pF 1.0 - 9.1 pF*	758 109 - 919*	B B	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR	DR	DR DR	DR DR	DR DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
1.1 pF	119	В	С	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
1.2 pF 1.3 pF	129 139	B	C	D D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
1.5 pF	159	В	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
1.6 pF	169	В	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
1.8 pF 2.0 pF	189 209	B B	C	D D						C1 C1	CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
2.2 pF	229	В	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
2.4 pF	249	В	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
2.7 pF 3.0 pF	279 309	B B	C	D D						C1 C1	CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
3.3 pF	339	В	С	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
3.6 pF 3.9 pF	369 399	B B	C	D D						CJ	CJ	CJ	Cl	CJ	Cl	Cl	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
4.3 pF	439	В	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
4.7 pF	479	В	С	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
5.1 pF 5.6 pF	519 569	B	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
6.2 pF	629	В	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
6.8 pF	689	В	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
7.5 pF 8.2 pF	759 829	B B	C	D D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
9.1 pF	919	В	C	D						CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
10 pF	100				F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
11 pF 12 pF	110 120				F	G	J	K	M	CJ	CJ	CJ	Cl	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
13 pF	130	l			F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
15 pF	150				F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
16 pF 18 pF	160 180				F	G	J	K K	M	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
20 pF	200				F	G	J	K	M	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
22 pF	220				F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
24 pF	240				F	G	J	K	M	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
27 pF 30 pF	270 300				F	G	J	K	M	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
33 pF	330				F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
36 pF	360				F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
39 pF 43 pF	390 430				F	G	J	K	M	CJ	Cl	CJ	Cl	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
47 pF	470				F	G	J	K	M	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
51 pF	510				F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
56 pF 62 pF	560 620				F	G	J	K	M	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
68 pF	680				F	G	J	K	M	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
75 pF	750				F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
82 pF 91 pF	820 910				F	G	J	K	M	CJ	CJ	CJ	CJ	CJ	CJ	C1 C1	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
100 pF	101				F	G	J	K	M	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
110 pF	111				F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
120 pF	121				F	G	J	K	M	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
130 pF 150 pF	131 151				F	G	J	K	M	CJ	Cl	CJ	Cl	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
160 pF	161				F	G	J	K	М	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
			Ra	ted	Volt	age	(VE	C)		10	16	25	50	100	200	250	2	16	25	50	100	200	250	9	16	25	50	100	200	250
Capacitance	Cap			Vo	ltag	e Co	ode			8	4	3	5	1	2	A	8	4	3	5	1	2	A	8	4	3	5	1	2	Α
	Code	H	C	ase Size/Series							0603				H			0805				t	1		1206	C				
	l			456	se Size/Series						-550																			



# Table 1C - Flexible Termination Capacitance Range/Selection Waterfall (0603 - 1206 Case Sizes) cont.

	Con	Case	e Siz	ze/S	Seri	es			С	060	3C					С	080	5C					С	1206	5C		
Capacitance	Cap Code	٧	oltag	je Co	ode		8	4	3	5	1	2	A	8	4	3	5	1	2	A	8	4	3	5	1	2	A
	Jour	Rate	d Vol	tage	(VD	C)	2	16	25	50	100	200	250	10	16	25	20	100	200	250	10	16	25	20	100	200	250
		Capac	itano	e To	lerai	ıce						ı						Chip T ickne				!S					
180 pF	181		F	G	J	K N		CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
200 pF 220 pF	201 221		F	G	J	K N		CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
240 pF	241		F	G	j	K		CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
270 pF	271		F	G	J	K N	CJ	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
300 pF	301		F	G	J	K		CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
330 pF 360 pF	331 361		F	G	J	K N		CJ	CJ	CJ	CJ	CJ	Cl	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
390 pF	391		F		J	K		CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
430 pF	431		F	G	J	K	_	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
470 pF	471		F	G	J	K		CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DD	DD	EQ	EQ	EQ	EQ	EQ	EQ	EQ
510 pF	511 561		F	G	J	K N		CJ	Cl	CJ	CJ	Cl	CJ	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
560 pF 620 pF	621		F	G	J	K		CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
680 pF	681		F	G	J	K	_	CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
750 pF	751		F	G	J	K N		CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
820 pF	821		F	G	J	KN		CJ	CJ	CJ	CJ	CJ	CJ	DR DR	DR DR	DR	DR	DR DD	DR DD	DR DD	EQ	EQ	EQ	EQ	EQ	EQ	EQ
910 pF 1,000 pF	911 102		F	G	J	K N		CJ	CJ	CJ	CJ	CJ	CJ	DR	DR	DR DR	DR DR	DD	DD	DD	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
1,100 pF	112		F	G	J	KN	_	CJ	CJ	CJ	CJ	CH	CH	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
1,200 pF	122		F	G	J	K		CJ	CJ	CJ	CJ	СН	СН	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	EQ	EQ	EQ
1,300 pF	132		F	G	J	K		CJ	CJ	CJ	CJ	CH	CH	DD	DD	DD	DD	DD	DR	DR	EQ	EQ	EQ	EQ	ER	ER	ER
1,500 pF 1,600 pF	152 162		F	G	J	K N		Cl	Cl	CJ	CJ	CH	CH	DD DD	DD DD	DD DD	DD	DD	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	ES ES	ER ES	ER ES
1,800 pF	182		F	G	J	KIN	_	CJ	CJ	CJ	CJ	CH	CH	DD	DD	DD	DD	DD	DR	DR	EQ	EQ	EQ	EQ	ES	ES	ES
2,000 pF	202		F	G	J	K		CJ	CJ	CJ	CJ	СН	СН	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	ES	ES	ES
2,200 pF	222		F	G	J	K N		CJ	CJ	CJ	CJ	СН	СН	DR	DR	DR	DR	DR	DR	DR	EQ	EQ	EQ	EQ	ET	ET	ET
2,400 pF 2,700 pF	242 272		F	G	J	K N		Cl	Cl	Cl	CJ			DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	DR DR	EQ EQ	EQ EQ	EQ EQ	EQ EQ	ER ER	ER ER	ER ER
3,000 pF	302		F	G	J	KN	_	CJ	CJ	CJ	CJ			DD	DD	DR	DR	DR	DR	DR	ER	ER	ER	ER	ER	EQ	EQ
3,300 pF	332		F	G	J	K N		CJ	CJ	CJ	CJ			DD	DD	DR	DR	DR	DR	DR	ER	ER	ER	ER	ET	EQ	EQ
3,600 pF	362		F	G	J	K N		CJ	CJ	CJ	CJ			DD	DD	DR	DR	DR	DD	DD	ER	ER	ER	ER	ET	EQ	EQ
3,900 pF	392 432		F	G	J	K N		CJ	CJ	CJ	CJ			DS DS	DS DS	DR DR	DR DR	DR DR	DD DD	DD DD	ER ER	ER ER	ER ER	ER ER	EF ER	EQ EQ	EQ EQ
4,300 pF 4,700 pF	432		F	G	J	KN		CJ	CJ	CJ	CJ			DS	DS	DR	DR	DR	DD	DD	ER	ER	ER	ER	ER	EQ	EQ
5,100 pF	512		F	G	J	K		CJ	CJ	CJ				DS	DS	DR	DR	DR	DD	DD	ES	ES	ES	ES	ES	EQ	EQ
5,600 pF	562		F	G	J	K N		CJ	CJ	CJ				DR	DR	DR	DR	DR	DD	DD	ES	ES	ES	ES	ES	EQ	EQ
6,200 pF	622		F	G	J	K		CJ	CJ	CJ				DR	DR	DR	DR	DR	DG	DG	EQ	EQ	EQ	EQ	EQ	EQ	EQ
6,800 pF 7,500 pF	682 752		F	G	J	K N	_	CJ	CJ	CJ				DR DR	DR DR	DR DR	DR DR	DR DR	DG DG	DG DG	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ	EQ EQ
8,200 pF	822		F	G		K		CJ	CJ					DR	DR	DR	DR	DR	DG	DG	ER	ER	EQ	EQ	EQ	ER	ER
9,100 pF	912		F	G	J	K		CJ	CJ					DR	DR	DR	DR	DR			ER	ER	EQ	EQ	EQ	ER	ER
10,000 pF	103		F	G	J	K		CJ	CJ					DR	DR	DR	DR				EQ	EQ	EQ	EQ	EQ	ER	ER
12,000 pF 15,000 pF	123 153		F	G	J J	K N	_	CJ	Cl					DR DR	DR DR	DR DR	DR DD	DS DG			EQ EQ	EQ	EQ	EQ EQ	EQ EQ	ES EF	ES EF
18,000 pF	183		F	G	J	K		30	30					DR	DR	DR	DD	50			EQ	EQ	EQ	EQ	EQ	EH	EH
22,000 pF	223		F	G	J	K N								DD	DD	DD	DF				EQ	EQ	EQ	EQ	ER	EH	EH
27,000 pF	273		F	G	J	KN								DF	DF	DF					EQ	EQ	EQ	EQ	ET		
33,000 pF 39,000 pF	333 393		F	G	J	K N	_							DG DG	DG DG	DG DG					EQ ER	EQ ER	EQ ER	EQ ET	EH		
47,000 pF	473		F	G	J	K								DG	DG	DG					ER	ER	ER	ET	EH		
56,000 pF	563		F	G	J	K N	1														ES	ES	ES	EF			
68,000 pF	683		F	G		KN															EF	EF	EF	EH			
82,000 pF 100,000 pF	823 104		F	G		K N															EH	EH	EH	EH			
100,000 με	104	Rate			_		2	9	25	20	100	200	250	2	92	25	20	9	200	250	5	9	25	20	100	200	250
Capacitance	Сар		oltag		<u> </u>	-,	8	4	3	5	1	2	A A	8	4	3	5	1	2	75 A	8	4	3	5	1	2	55 A
Capacitance	Code		e Siz			•	+°	-		0603			_ ^	۴	_ •		0805			_ A	<del>ا</del> ٔ	-		1206			_ A
		Cas	e 317	Le/ 3	erie	<u> </u>	1			0003	-						,0000	,,,					·	1200			



# Table 1D - Flexible Termination Capacitance Range/Selection Waterfall (1210 - 2220 Case Sizes)

			Case Size/Series  Voltage Code							C	1210	C				C18	12C		C	2220	C		
Capacitance	Сар			Vo	ltag	e Co	ode			8	4	3	5	1	2	Α	5	1	2	Α	5	1	2
	Code	H	Ra		Volt			OC)		9	9	25	20	8	200	250	20	9	200	250	20	90	200
		H			anc	Ť	•					Pro	duct	Avai	labili	ty and	d Chi	p Thi	cknes	s Co	des	_	_ 7
1.0 - 9.1 pF*	109 - 919*	D			unc	- 10	1010			FN	FN		_				hick	ness	<u>Dime</u>	nsion	s		
1.0 - 9.1 pF^ 1.1 pF	119	B B	C	D D						FN	FN	FN FN	FN FN	FN FN	FN FN	FN FN							
1.2 pF	129	В	C	D						FN	FN	FN	FN	FN	FN	FN							
1.3 pF	139	В	C	D						FN	FN	FN	FN	FN	FN	FN					İ		
1.5 pF	159	В	С	D						FN	FN	FN	FN	FN	FN	FN							
1.6 pF	169	В	С	D						FN	FN	FN	FN	FN	FN	FN							
1.8 pF	189	В	С	D						FN	FN	FN	FN	FN	FN	FN	l				•		
2.0 pF	209	В	С	D						FN	FN	FN	FN	FN	FN	FN							
2.2 pF	229	В	C	D						FN	FN	FN	FN	FN	FN	FN							
2.4 pF	249 279	В	C	D						FN FN	FN FN	FN FN	FN	FN FN	FN FN	FN FN							
2.7 pF	309	В	C	D						FN	FN	FN	FN FN	FN	FN	FN							
3.0 pF 3.3 pF	339	В	C	D						FN	FN	FN	FN	FN	FN	FN							
3.6 pF	369	В	C	D						FN	FN	FN	FN	FN	FN	FN							
3.9 pF	399	В	C	D						FN	FN	FN	FN	FN	FN	FN							
4.3 pF	439	В	С	D						FN	FN	FN	FN	FN	FN	FN							
4.7 pF	479	В	С	D						FN	FN	FN	FN	FN	FN	FN					l		
5.1 pF	519	В	C	D						FN	FN	FN	FN	FN	FN	FN	•				•		
5.6 pF	569	В	С	D						FN	FN	FN	FN	FN	FN	FN							
6.2 pF	629	В	С	D						FN	FN	FN	FN	FN	FN	FN							
6.8 pF	689	В	C	D						FN	FN	FN	FN	FN	FN	FN							
7.5 pF	759 829	B B	C	D D						FN FN	FN FN	FN FN	FN FN	FN FN	FN FN	FN FN							
8.2 pF 9.1 pF	919	В	C	D						FN	FN	FN	FN	FN	FN	FN							
10 pF	100	١٢		0	F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
11 pF	110				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
12 pF	120	İ			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	İ				İ		
13 pF	130	ĺ			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	İ				İ		
15 pF	150	l			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	İ				İ		
16 pF	160				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
18 pF	180				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
20 pF	200				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
22 pF	220				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
24 pF	240				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
27 pF	270				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
30 pF	300	l			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN					1		
33 pF	330				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
36 pF	360				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
39 pF	390 430				F	G G	J	K	M M	FN FN	FN FN	FN FN	FN FN	FN FN	FN FN	FN FN							
43 pF	430				F	G	J	K	M	FN	FN	FN	FN	FN	FN	FN							
47 pF 51 pF	510				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
56 pF	560				F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
υ μι	- 500		Ra	ted	Volt	_	_		141	2	91	25	20	901	200	250	20	9	200	250	20	9	200
Capacitance	Cap	$\vdash$	- na			_	_		_	8	4	3	5	1	2	A	5	1	2	A	5	1	2
Capacitance	Code	$\vdash$	Voltage Code							^				_^_	1 - 1 - 1 -								
			Case Size/Series				C1210C					C1812C				C2220C							



# **Table 1D – Flexible Termination Capacitance Range/Selection Waterfall** (1210 - 2220 Case Sizes) cont.

							_															
	Con	С	as	e Siz	:e/	Ser	ies				C	1210	C				C18	12C		C	2220	C
Capacitance	Cap		1	Voltag	e Co	ode			8	4	3	5	1	2	Α	5	1	2	Α	5	1	2
·	Code		Rate	ed Volt	age	(VI	OC)		10	16	25	20	100	200	250	20	90	200	250	20	100	200
		С	ара	citanc	e To	lera	ince							labili	y and			knes	s Co			
62 pF	620			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	IIICK	1699	Dillie	115101	S		
68 pF	680			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	İ				İ		
75 pF	750			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
82 pF	820			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN					•		
91 pF	910			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
100 pF	101			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
110 pF	111			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
120 pF	121			F	G	J	K	M	FN	FN	FN	FN	FN	FN	FN							
130 pF	131			F	G	J	K	M M	FN FN	FN FN	FN FN	FN FN	FN	FN FN	FN							
150 pF 160 pF	151 161			F	G	J	K	M	FN	FN	FN	FN	FN FN	FN	FN FN							
180 pF	181			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	l				ł		
200 pF	201			F	G	J	K	M	FN	FN	FN	FN	FN	FN	FN							
220 pF	221			F	G	J	K	M	FN	FN	FN	FN	FN	FN	FN	i				i		
240 pF	241			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	İ				İ		
270 pF	271			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN					İ		
300 pF	301			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	İ				İ		
330 pF	331			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
360 pF	361			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN					İ		
390 pF	391			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
430 pF	431			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN							
470 pF	471			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	GB	GB	GB	GB			
510 pF	511			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	GB	GB	GB	GB			
560 pF	561			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	GB	GB	GB	GB			
620 pF	621			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	GB	GB	GB	GB			
680 pF	681			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	GB	GB	GB	GB	l		
750 pF	751			F	G	J	K	M	FN FN	FN FN	FN FN	FN	FN	FN FN	FN FN	GB GB	GB GB	GB GB	GB GB			
820 pF 910 pF	821 911			F	G	J	K	M	FN	FN	FN	FN FN	FN FN	FN	FN	GB	GB	GB	GB			
1,000 pF	102			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	GB	GB	GB	GB			
1,000 pF	112			F	G	J	K	М	FN	FN	FN	FN	FN	FN	FN	GB	GB	GB	GB			
1,200 pF	122			F	G	J	K	M	FN	FN	FN	FN	FN	FN	FN	GB	GB	GB	GB			
1,300 pF	132			F	G	J	K	М	FN	FN	FN	FN	FN	FQ	FQ	GB	GB	GB	GB			
1,500 pF	152	i		F	G	J	K	М	FN	FN	FN	FN	FN	FE	FE	GB	GB	GB	GB	l		
1,600 pF	162			F	G	J	K	М	FN	FN	FN	FN	FN	FE	FE	GB	GB	GB	GB	l		
1,800 pF	182			F	G	J	K	М	FN	FN	FN	FN	FN	FE	FE	GB	GB	GB	GB	<u> </u>		
2,000 pF	202			F	G	J	K	М	FN	FN	FN	FN	FQ	FE	FE	GB	GB	GB	GB			
2,200 pF	222			F	G	J	K	М	FN	FN	FN	FN	FQ	FZ	FZ	GB	GB	GB	GB			
2,400 pF	242			F	G	J	K	М	FN	FN	FN	FN	FQ	FQ	FQ							
2,700 pF	272			F	G	J	K	М	FN	FN	FN	FN	FQ	FQ	FQ	GB	GB	GB	GB			
3,000 pF	302			F	G	J	K	M	FN	FN	FN	FN	FQ	FA	FA	0.5	0.5	0.5	0.0			
3,300 pF	332		Dati	F	G	J	K	М	FN 01	FN 91	55 N	FN 02	FA 001	FA	FA	GB OS	GB 001	GB	GB	-	100	9
Compaitemen	Сар			ed Volt	Ť	<u> </u>	JC)		<u> </u>	<u> </u>			·	200	250		<u> </u>	، 200	250	، 50	_	، 200
Capacitance	Code		Voltage Code Case Size/Series				8	4	3	5	1	2	A	C1812C			А	5 1 2 C2220C				
		L	cas	se Siz	e/S	eri	es					1210	Ü				U18	120		C	2220	<u>.                                    </u>



# Table 1D - Flexible Termination Capacitance Range/Selection Waterfall (1210 - 2220 Case Sizes) cont.

	0		Ca	se S	Siz	e/\$	Ser	ies	•			С	1210	C				C18	12C		C2220C		
Capacitance	Cap Code			Vol	tage	e Co	ode			8	4	3	5	1	2	A	5	1	2	A	5	1	2
	Coue		Ra	ited \	/olt	age	(VI	OC)		10	16	25	20	100	200	250	50	100	200	250	50	100	200
			Cap	pacita	ance	е То	lera	ance							labili	ty and			knes	s Co			
3,600 pF	362	⊢	_		F	G	J	K	М	FN	FN	FN	FN	FA	FA	FA	nicki	ness	uime	nsion	S I		
3,900 pF	392				F	G	J	K	M	FN	FN	FN	FN	FA	FA	FA	GB	GB	GB	GB			
4,300 pF	432	l			F	G	J	K	М	FN	FN	FN	FN	FA	FA	FA	OB	OD	OD	OB			
4,700 pF	472	l			F	G	J	K	М	FA	FA	FA	FA	FZ	FZ	FZ	GB	GB	GD	GD			
5,100 pF	512	l			F	G	J	K	М	FN	FN	FN	FN	FZ	FZ	FZ	OB	OD	OD	OD.			
5,600 pF	562				F	G	J	K	M	FN	FN	FN	FN	FZ	FZ	FZ	GB	GB	GH	GH			
6,200 pF	622				F	G	J	K	M	FN	FN	FN	FN	FZ	FN	FN	OD	OD	UII	011			
6,800 pF	682				F	G	J	K	M	FN	FN	FN	FN	FZ	FN	FN	GB	GB	GJ	GJ	JE	JE	JB
7,500 pF	752				F	G	J	K	M	FO	FO	FO	FO	FO	FN	FN	OD	OD	0.0	00	JL	JL	JD
8,200 pF	822				F	G	J	K	M	FO	F0	FO	F0	FO	FN	FN	GB	GH	GB	GB	JE	JE	JB
9,100 pF	912				F	G	J	K	M	FE	FF	FF	FE	FE	FN	FN	OD	UII	OD	OD	JL	JL	JD
10,000 pF	103				F	G	J	K	M	FA	FA	FA	FA	FA	FN	FN	GB	GH	GB	GB	JE	JE	JB
12,000 pF	123				F	G	J	K	M	FN	FN	FN	FN	FN	FN	FN	GB	GG	GB	GB	JE	JE	JB
15,000 pF	153				F	G	J	K	M	FN	FN	FN	FN	FN	FQ	FQ	GB	GB	GB	GB	JE	JE	JB
18,000 pF	183				F	G	J	K	M	FN	FN	FN	FN	FN	F0	FQ FO	GB	GB	GB	GB	JE	JE	JB
22,000 pF	223				F	G	J	K	M	FN	FN	FN	FN	FN	FA	FA	GB	GB	GB	GB	JE	JB	JB
27,000 pF	273				F	G		K	M	FN	FN	FN	FN	FN	FZ	FZ	GB	GB	GB	GB	JE	JB	JB
33,000 pF	333				F	G	J	K	M	FN	FN	FN	FN	FN	FU	FU	GB	GB	GB	GB	JB	JB	JB
' '	393					G		K	M	FN	FN	FN	FN	FE	FU	FU	GB	GB	GB	GB		JB	
39,000 pF	393 473				F F		J		M	FN				FE	FJ	FJ	GB	GB	GD		JB	JB	JB
47,000 pF					_	G	J	K	_		FN	FN	FN		FJ	FJ		GB		GD GD	JB	-	JB
56,000 pF	563				F	G	J	K	M	FN	FN	FN	FN	FA			GB		GD		JB	JB	JB
68,000 pF	683				F	G	J	K	M	FN	FN	FN	FQ	FZ			GB	GB	GK	GK	JB	JB	JB
82,000 pF	823				F	G	J	K	M	FQ	FQ	FQ	FA	FU			GB	GB	GM	GM	JB	JB	JB
100,000 pF	104				F	G	J	K	M	FE	FE	FE	FZ	FM			GB	GD	GM	GM	JB	JB	JD
120,000 pF	124				F	G	J	K	M	FZ	FZ	FZ	FU				GB	GH			JB	JB	JD
150,000 pF	154				F	G	J	K	M	FU	FU	FU	FM				GD	GN			JB	JB	JG
180,000 pF	184				F	G	J	K	M	FJ	FJ	FJ					GH				JB	JD	JG
220,000 pF	224				F	G	J	K	M								GK				JB	JD	JL
270,000 pF	274				F	G	J	K	М												JB	JF	
330,000 pF	334				F	G	J	K	M												JD	JG	
390,000 pF	394				F	G	J	K	М												JG		
470,000 pF	474	⊢			F	G	J	K	М	├				_	_	_		_		_	JG	_	_
	Сар		Ra	ted \		_	<u> </u>	OC)		2	16	22	20	100	200	250	20	100	200	250	20	100	200
Capacitance	Code			Vol	tag	e Co	ode			8	4	3	5	1	2	A	5	1	2	A	5	1	2
			Case Size/Series				C1210C					C1812C				C2220C							



# **Performance and Reliability: Test Methods and Conditions**

Test	Reference	Test Condition	Limits
Visual and Mechanical	KEMET Internal	No defects that may affect performance (10X)	Dimensions according KEMET Spec Sheet
Capacitance (Cap)	KEMET Internal	$C \leq 1,000 \text{ pF}$ Frequency: 1 MHz $\pm 100 \text{ kHz}$ Voltage*: 1.0 V $_{\text{rms}} \pm 0.2 \text{ V}$ C > 1,000 pF Frequency: 1 kHz $\pm 50 \text{ Hz}$ Voltage: 1.0 V $_{\text{rms}} \pm 0.2 \text{ V}$ * See part number specification sheet for voltage	Within Tolerance
Dissipation Factor (DF)	KEMET Internal	C ≤ 1,000 pF Frequency: 1 MHz $\pm$ 100 kHz Voltage*:1.0 V $_{rms}$ $\pm$ 0.2 V C > 1,000 pF Frequency: 1 kHz $\pm$ 50 Hz Voltage: 1.0 V $_{rms}$ $\pm$ 0.2 V * See part number specification sheet for voltage"	Within Specification Dissipation factor (DF) maximum limit at 25°C = 0.1%
			Within Specification
Insulation Resistance (IR)	KEMET Internal	Rated voltage applied for 120 ±5 seconds at 25°C	To obtain IR limit, divide MΩ-μF value by the capacitance and compare to GΩ limit. Select the lower of the two limits.
			1,000 megaohm microfarads or 100 G $\Omega$ .
Temperature Coefficient of Capacitance (TCC)	KEMET Internal	Capacitance change with reference to +25°C and 0 VDC applied.  * See part number specification sheet for voltage    Step   Temperature (°C)	Within Specifcation ±30 ppm/°C  *Except :1210 Cap Code >= 682; 1812 Cap Code >= 471;  2220 Cap Code >=682  ±30 ppm/°C from -55°C to +125°C:  ±60 ppm/°C from +125°C to +150°C
Dielectric Withstanding Voltage (DWV)	KEMET Internal	250% of rated voltage (5 ±1 seconds and charge/discharge not exceeding 50 mA)	Cap: Initial Limit DF: Initial Limit IR: Initial Limit Withstand test voltage without insulation breakdown or damage.
Aging Rate (Maximum % Capacitance Loss/Decade Hour)	KEMET Internal	Maximum % capacitance loss/decade hour	0% Loss/Decade Hour



# **Performance and Reliability: Test Methods and Conditions cont.**

Test	Reference	Test Condition	Limits
Terminal Strength	KEMET Internal	Shear stress test per specific case size, Time: 60±1 seconds  Case Size Force  0402 3N  0603 5N  0805 9N  ≥1206 18N	No evidence of mechanical damage
Board Flex	AEC-Q200-005	3.0 mm minimum  Test time: 60± 5 seconds  Ramp time: 1 mm/second	No evidence of mechanical damage
Solderability	J-STD-002	Condition: 4 hours ± 15 minimum at 155°C dry bake apply all methods Test 245 ± 5°C (SnPb & Pb-Free)	Visual Inspection. 95% coverage on termination. No leaching
Temperature Cycling	JESD22 Method JA-104	1,000 cycles (-55°C to +150°C) 2 - 3 cycles per hour Soak Time 1 or 5 minutes	Measurement at 24 hours ±4 hours after test conclusion. Cap: Initial Limit DF: Initial Limit IR: Initial Limit
Biased Humidity	MIL-STD-202 Method 103	Load Humidity: 1,000 hours 85°C/85% RH and 200 VDC maximum. Low Volt Humidity: 1,000 hours 85°C/85% RH and 1.5 V.	Measurement at 24 hours ±4 hours after test conclusion. Within Post Environmental Limits Cap: ±0.3% or ±0.25 pF shift IR: 10% of Initial Limit DF Limits Maximum: 0.5%
Moisture Resistance	MIL-STD-202 Method 106	Number of cycles required 10, 24 hours per cycle. Steps 7a and 7b not required	Measurement at 24 hours ±4 hours after test conclusion. Within Post Environmental Limits Cap: ±0.3% or ±0.25 pF shift IR: 10% of Initial Limit DF Limits Maximum: 0.5%
Thermal Shock	MIL-STD-202 Method 107	Number of cycles required 5, (-55°C to 150°C) Dwell time 15 minutes.	Cap: Initial Limit DF: Initial Limit IR: Initial Limit
High Temperature Life	MIL-STD-202	1,000 hours at 150°C with 2 X rated voltage applied	Within Post Environmental Limits Cap: ±0.3% or ±0.25 pF shift
Storage Life	Method 108	1,000 hours at 150°C, Unpowered	IR: 10% of Initial Limit DF: 0.5%



## Performance and Reliability: Test Methods and Conditions cont.

Test	Reference	Test Condition	Limits
Vibration	MIL-STD-202 Method 204	5 g's for 20 minutes, 12 cycles each of 3 orientations. Test from 10 – 2,000 Hz	Cap: Initial Limit DF: Initial Limit IR: Initial Limit
Mechanical Shock	MIL-STD-202 Method 213	1,500 g's 0.5 ms Half-sine, Velocity Change 15.4 feet/second (Condition F)	Cap: Initial Limit DF: Initial Limit IR: Initial Limit
Resistance to Solvents	MIL-STD-202 Method 215	Add Aqueous wash chemical OKEMCLEAN (A 6% concentrated Oakite cleaner) or equivalent. Do not use banned solvents.	Visual Inspection 10X Readable marking, no decoloration or stains. No physical damage.

# Table 2A - Standard Termination Chip Thickness/Tape & Reel Packaging Quantities

Thickness	Case	Thickness ±	Paper (	Quantity	Plastic (	Quantity
Code	Size <sup>1</sup>	Range (mm)	7" Reel	13" Reel	7" Reel	13" Reel
BB	0402	0.50 ± 0.05	10,000	50,000	0	0
BD	0402	0.55 ± 0.05	10,000	50,000	0	0
CF	0603	0.80 ± 0.07	4,000	15,000	0	0
CH	0603	0.85 ± 0.07	4,000	10,000	0	0
DN	0805	0.78 ± 0.10	4,000	15,000	0	0
DP	0805	0.90 ± 0.10	4,000	15,000	0	0
DE	0805	1.00 ± 0.10	0	0	2,500	10,000
DF	0805	1.10 ± 0.10	0	0	2,500	10,000
DG	0805	1.25 ± 0.15	0	0	2,500	10,000
EB	1206	0.78 ± 0.10	0	0	4,000	10,000
EC	1206	0.90 ± 0.10	0	0	4,000	10,000
ED	1206	1.00 ± 0.10	0	0	2,500	10,000
EE	1206	1.10 ± 0.10	0	0	2,500	10,000
EF	1206	1.20 ± 0.15	0	0	2,500	10,000
EH	1206	1.60 ± 0.20	0	0	2,000	8,000
FB	1210	0.78 ± 0.10	0	0	4,000	10,000
FC	1210	0.90 ± 0.10	0	0	4,000	10,000
FE	1210	1.00 ± 0.10	0	0	2,500	10,000
FF	1210	1.10 ± 0.10	0	0	2,500	10,000
FG	1210	1.25 ± 0.15	0	0	2,500	10,000
FH	1210	1.55 ± 0.15	0	0	2,000	8,000
FM	1210	1.70 ± 0.20	0	0	2,000	8,000
FJ	1210	1.85 ± 0.20	0	0	2,000	8,000
GB	1812	1.00 ± 0.10	0	0	1,000	4,000
GD	1812	1.25 ± 0.15	0	0	1,000	4,000
GH	1812	1.40 ± 0.15	0	0	1,000	4,000
GG	1812	1.55 ± 0.10	0	0	1,000	4,000
GK	1812	1.60 ± 0.20	0	0	1,000	4,000
GJ	1812	1.70 ± 0.15	0	0	1,000	4,000
GN	1812	1.70 ± 0.20	0	0	1,000	4,000
GM	1812	2.00 ± 0.20	0	0	500	2,000
JB	2220	1.00 ± 0.15	0	0	1,000	4,000
JD	2220	1.30 ± 0.15	0	0	1,000	4,000
JE	2220	1.40 ± 0.15	0	0	1,000	4,000
JF	2220	1.50 ± 0.15	0	0	1,000	4,000
JG	2220	1.70 ± 0.15	0	0	1,000	4,000
JL	2220	2.00 ± 0.20	0	0	500	2,000
Thickness	Case	Thickness ±	7" Reel	13" Reel	7" Reel	13" Reel
Code	Size <sup>1</sup>	Range (mm)	Paper Q	uantity <sup>1</sup>	Plastic	Quantity

Package quantity based on finished chip thickness specifications.



**Table 2B - Flexible Termination Chip Thickness/Tape & Reel Packaging Quantities** 

Thickness	Case	Thickness ±	Paper C	uantity	Plastic (	Quantity
Code	Size <sup>1</sup>	Range (mm)	7" Reel	13" Reel	7" Reel	13" Reel
CJ	0603	0.80 ± 0.15	4,000	15,000	0	0
CH	0603	0.85 ± 0.07	4,000	10,000	0	0
DR	0805	0.78 ± 0.20	0	0	4,000	10,000
DD	0805	0.90 ± 0.10	0	0	4,000	10,000
DS	0805	1.00 ± 0.20	0	0	2,500	10,000
DF	0805	1.10 ± 0.10	0	0	2,500	10,000
DG	0805	1.25 ± 0.15	0	0	2,500	10,000
EQ	1206	0.78 ± 0.20	0	0	4,000	10,000
ER	1206	0.90 ± 0.20	0	0	4,000	10,000
ES	1206	1.00 ± 0.20	0	0	2,500	10,000
ET	1206	1.10 ± 0.20	0	0	2,500	10,000
EF	1206	1.20 ± 0.15	0	0	2,500	10,000
EH	1206	1.60 ± 0.20	0	0	2,000	8,000
FN	1210	0.78 ± 0.20	0	0	4,000	10,000
FQ	1210	0.90 ± 0.20	0	0	4,000	10,000
FE	1210	1.00 ± 0.10	0	0	2,500	10,000
FA	1210	1.10 ± 0.15	0	0	2,500	10,000
FZ	1210	1.25 ± 0.20	0	0	2,500	10,000
FU	1210	1.55 ± 0.20	0	0	2,000	8,000
FM	1210	1.70 ± 0.20	0	0	2,000	8,000
FJ	1210	1.85 ± 0.20	0	0	2,000	8,000
GB	1812	1.00 ± 0.10	0	0	1,000	4,000
GD	1812	1.25 ± 0.15	0	0	1,000	4.000
GH	1812	1.40 ± 0.15	0	0	1,000	4,000
GG	1812	1.55 ± 0.10	0	0	1,000	4,000
GK	1812	1.60 ± 0.20	0	0	1,000	4,000
GJ	1812	1.70 ± 0.15	Ö	0	1,000	4,000
GN	1812	1.70 ± 0.20	0	0	1,000	4,000
GM	1812	2.00 ± 0.20	0	0	500	2,000
JB	2220	1.00 ± 0.15	0	0	1,000	4,000
JD	2220	1.30 ± 0.15	0	0	1,000	4,000
JE	2220	1.40 ± 0.15	0	0	1,000	4,000
JF	2220	1.50 ± 0.15	0	0	1,000	4,000
JG	2220	1.70 ± 0.15	0	Ö	1,000	4,000
JL	2220	2.00 ± 0.20	0	0	500	2,000
Thickness	Case	Thickness ±	7" Reel	13" Reel	7" Reel	13" Reel
Code	Size <sup>1</sup>	Range (mm)	Paper Q	uantity <sup>1</sup>	Plastic (	Quantity

Package quantity based on finished chip thickness specifications.



### **Table 2C - Bulk Packaging Quantities**

Doolson	ing Trees	Loose Pa	ackaging		
Packag	ing Type	Bulk Bag	(default)		
Packagin	g C-Spec <sup>1</sup>	N/	/A <sup>2</sup>		
Case	Size	Packaging Quantities (	pieces/unit packaging)		
EIA (in)	Metric (mm)	Minimum	Maximum		
0402	1005				
0603	1608				
0805	2012		50,000		
1206	3216				
1210	3225	1			
1808	4520	1			
1812	4532				
1825	4564		20,000		
2220	5650				
2225	5664				

¹ The "Packaging C-Spec" is a 4 to 8 digit code which identifies the packaging type and/or product grade. When ordering, the proper code must be included in the 15th through 22nd character positions of the ordering code. See "Ordering Information" section of this document for further details. Commercial Grade product ordered without a packaging C-Spec will default to our standard "Bulk Bag" packaging. Contact KEMET if you require a bulk bag packaging option for Automotive Grade products.

<sup>&</sup>lt;sup>2</sup> A packaging C-Spec (see note 1 above) is not required for "Bulk Bag" packaging (excluding Anti-Static Bulk Bag and Automotive Grade products). The 15th through 22nd character positions of the ordering code should be left blank. All product ordered without a packaging C-Spec will default to our standard "Bulk Bag" packaging.



Table 3 – Standard Termination Chip Capacitor Land Pattern Design **Recommendations per IPC-7351** 

EIA Size Code	Metric Size	Size Land Protrusion (mm)						Media	sity Lev an (Nor otrusio		)	Density Level C: Minimum (Least) Land Protrusion (mm)						
Oouc	Oouc	С	Y	X	V1	V2	С	Y	X	<b>V</b> 1	V2	С	Υ	X	V1	V2		
0402	1005	0.50	0.72	0.72	2.20	1.20	0.45	0.62	0.62	1.90	1.00	0.40	0.52	0.52	1.60	0.80		
0603	1608	0.90	1.15	1.10	4.00	2.10	0.80	0.95	1.00	3.10	1.50	0.60	0.75	0.90	2.40	1.20		
0805	2012	1.00	1.35	1.55	4.40	2.60	0.90	1.15	1.45	3.50	2.00	0.75	0.95	1.35	2.80	1.70		
1206	3216	1.60	1.35	1.90	5.60	2.90	1.50	1.15	1.80	4.70	2.30	1.40	0.95	1.70	4.00	2.00		
1210	3225	1.60	1.35	2.80	5.65	3.80	1.50	1.15	2.70	4.70	3.20	1.40	0.95	2.60	4.00	2.90		
1210¹	3225	1.50	1.60	2.90	5.60	3.90	1.40	1.40	2.80	4.70	3.30	1.30	1.20	2.70	4.00	3.00		
1812	4532	2.15	1.60	3.60	6.90	4.60	2.05	1.40	3.50	6.00	4.00	1.95	1.20	3.40	5.30	3.70		
2220	5650	2.75	1.70	5.50	8.20	6.50	2.65	1.50	5.40	7.30	5.90	2.55	1.30	5.30	6.60	5.60		

<sup>&</sup>lt;sup>1</sup> Only for capacitance values ≥ 22 μF.

Density Level A: For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes. KEMET only recommends wave soldering of EIA 0603, 0805 and 1206 case sizes.

Density Level B: For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes. Density Level C: For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC Standard 7351 (IPC-7351).

Image below based on Density Level B for an EIA 1210 case size.

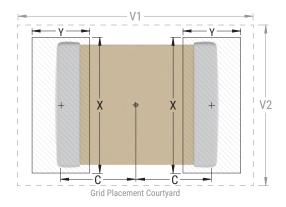





Table 4 – Flexible Termination Chip Capacitor Land Pattern Design Recommendations per IPC-7351 (mm)

EIA Size Code	Metric Size Code		Maxi	sity Lev mum (I rotrusio	Most)	)	ı	Media	sity Lev an (Nor rotrusio		)	Density Level C: Minimum (Least) Land Protrusion (mm)						
oouc	Jouc	С	Υ	X	V1	V2	С	Y	X	<b>V</b> 1	V2	С	Y	X	V1	V2		
0603	1608	0.85	1.25	1.10	4.00	2.10	0.75	1.05	1.00	3.10	1.50	0.65	0.85	0.90	2.40	1.20		
0805	2012	0.99	1.44	1.66	4.47	2.71	0.89	1.24	1.56	3.57	2.11	0.79	1.04	1.46	2.42	1.81		
1206	3216	1.59	1.62	2.06	5.85	3.06	1.49	1.42	1.96	4.95	2.46	1.39	1.22	1.86	4.25	2.16		
1210	3225	1.59	1.62	3.01	5.90	4.01	1.49	1.42	2.91	4.95	3.41	1.39	1.22	2.81	4.25	3.11		
1808	4520	2.30	1.75	2.30	7.40	3.30	2.20	1.55	2.20	6.50	2.70	2.10	1.35	2.10	5.80	2.40		
1812	4532	2.10	1.80	3.60	7.00	4.60	2.00	1.60	3.50	6.10	4.00	1.90	1.40	3.40	5.40	3.70		
2220	5650	2.85	2.10	5.50	8.80	6.50	2.75	1.90	5.40	7.90	5.90	2.65	1.70	5.30	7.20	5.60		

Density Level A: For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes. KEMET only recommends wave soldering of EIA 0603, 0805, and 1206 case sizes.

**Density Level B:** For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes. Density Level C: For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC Standard 7351 (IPC-7351).

Image below based on Density Level B for an EIA 1210 case size.

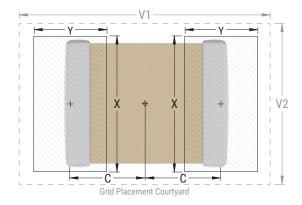



## **Soldering Process**


#### **Recommended Soldering Technique:**


- Solder wave or solder reflow for EIA case sizes 0603, 0805 and 1206
- · All other EIA case sizes are limited to solder reflow only

#### **Recommended Reflow Soldering Profile:**

KEMET's families of surface mount multilayer ceramic capacitors (SMD MLCCs) are compatible with wave (single or dual), convection, IR or vapor phase reflow techniques. Preheating of these components is recommended to avoid extreme thermal stress. KEMET's recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/J-STD-020 standard for moisture sensitivity testing. These devices can safely withstand a maximum of three reflow passes at these conditions.

Profile Feature	Terminat	ion Finish
1 Tome Teature	SnPb	100% Matte Sn
Preheat/Soak		
Temperature Minimum (T <sub>Smin</sub> )	100°C	150°C
Temperature Maximum (T <sub>Smax</sub> )	150°C	200°C
Time ( $t_s$ ) from $T_{Smin}$ to $T_{Smax}$	60 - 120 seconds	60 - 120 seconds
Ramp-Up Rate (T <sub>L</sub> to T <sub>p</sub> )	3°C/second maximum	3°C/second maximum
Liquidous Temperature (T <sub>L</sub> )	183°C	217°C
Time Above Liquidous (t <sub>L</sub> )	60 - 150 seconds	60 - 150 seconds
Peak Temperature (T <sub>P</sub> )	235°C	260°C
Time Within 5°C of Maximum Peak Temperature (t <sub>p</sub> )	20 seconds maximum	30 seconds maximum
Ramp-Down Rate (T <sub>p</sub> to T <sub>L</sub> )	6°C/second maximum	6°C/second maximum
Time 25°C to Peak Temperature	6 minutes maximum	8 minutes maximum



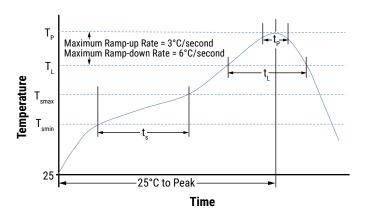




#### Storage and Handling

Ceramic chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature – reels may soften or warp and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts and atmospheres should be free of chlorine and sulfur bearing compounds. For optimized solderability chip stock should be used promptly, preferably within 1.5 years of receipt.

#### Construction


#### **Standard Termination**

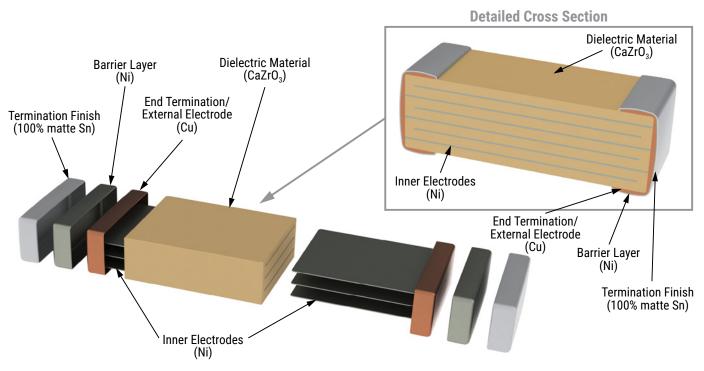



#### **Construction cont.**

#### Flex Termination

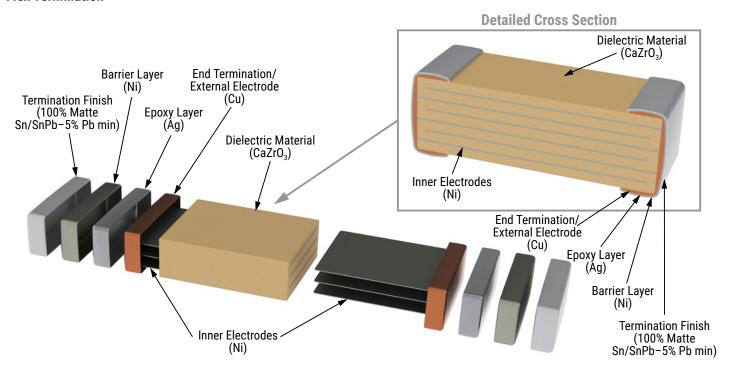

# **Capacitor Marking (Optional)**

Laser marking option is not available on:

- COG, U2J, X8G, X8R and Y5V dielectric devices.
- EIA 0402 case size devices.
- EIA 0603 case size devices with Flexible Termination option.
- KPS Commercial and Automotive grade stacked devices.

These capacitors are supplied unmarked only.



### **Tape & Reel Packaging Information**

KEMET offers multilayer ceramic chip capacitors packaged in 8, 12 and 16 mm tape on 7" and 13" reels in accordance with EIA Standard 481. This packaging system is compatible with all tape-fed automatic pick and place systems. See Table 2 for details on reeling quantities for commercial chips.

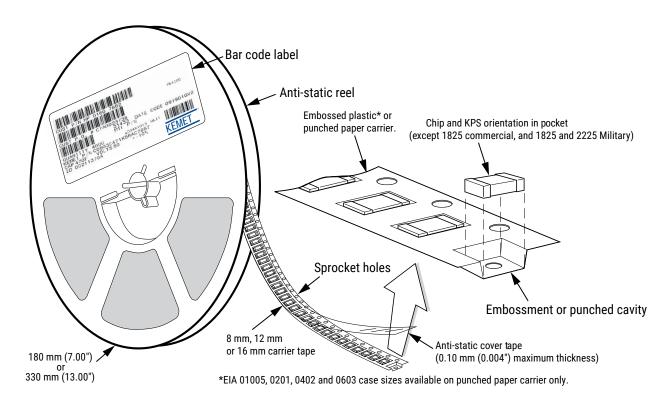


Table 5 - Carrier Tape Configuration, Embossed Plastic & Punched Paper (mm)


EIA Case Size	Tape Size (W)*	<b>Embossed Plastic</b>		Punched Paper		
		7" Reel	13" Reel	7" Reel	13" Reel	
		Pitch (P <sub>1</sub> )*		Pitch (P <sub>1</sub> )*		
01005 - 0402	8			2	2	
0603	8			4	4	
0805	8	4	4	4	4	
1206 - 1210	8	4	4	4	4	
1805 – 1808	12	4	4			
≥ 1812	12	8	8			
KPS 1210	12	8	8			
KPS 1812 and 2220	16	12	12			
Array 0612	8	4	4			

<sup>\*</sup>Refer to Figures 1 and 2 for W and  $P_1$  carrier tape reference locations.

<sup>\*</sup>Refer to Tables 6 and 7 for tolerance specifications.



### Figure 1 – Embossed (Plastic) Carrier Tape Dimensions

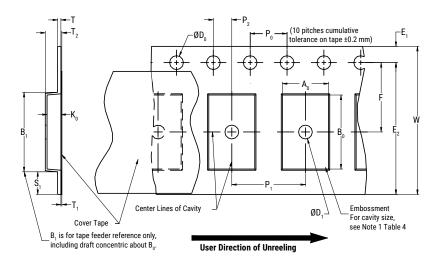

## **Table 6 – Embossed (Plastic) Carrier Tape Dimensions**


Metric will govern

Constant Dimensions — Millimeters (Inches)									
Tape Size	D <sub>0</sub>	D <sub>1</sub> Minimum Note 1	E <sub>1</sub>	P <sub>0</sub>	P <sub>2</sub>	R Reference Note 2	S <sub>1</sub> Minimum Note 3	T Maximum	T <sub>1</sub> Maximum
8 mm		1.0 (0.039)				25.0 (0.984)			
12 mm	1.5 +0.10/-0.0 (0.059 +0.004/-0.0)	1.0	1.75 ±0.10 (0.069 ±0.004)	4.0 ±0.10 (0.157 ±0.004)	2.0 ±0.05 (0.079 ±0.002)	30	0.600 (0.024)	0.600 (0.024)	0.100 (0.004)
16 mm		(0.059)			(1.181)				
Variable Dimensions — Millimeters (Inches)									
Tape Size	Pitch	B <sub>1</sub> Maximum Note 4	${\sf E_2}$ Minimum	F	P <sub>1</sub>	T <sub>2</sub> Maximum	W Maximum	A <sub>0</sub> ,B <sub>0</sub>	& K <sub>0</sub>
8 mm	Single (4 mm)	4.35 (0.171)	6.25 (0.246)	3.5 ±0.05 (0.138 ±0.002)	4.0 ±0.10 (0.157 ±0.004)	2.5 (0.098)	8.3 (0.327)		
12 mm	Single (4 mm) and double (8 mm)	8.2 (0.323)	10.25 (0.404)	5.5 ±0.05 (0.217 ±0.002)	8.0 ±0.10 (0.315 ±0.004)	4.6 (0.181)	12.3 (0.484)	Note 5	
16 mm	Triple (12 mm)	12.1 (0.476)	14.25 (0.561)	7.5 ±0.05 (0.138 ±0.002)	12.0 ±0.10 (0.157 ±0.004)	4.6 (0.181)	16.3 (0.642)		

- 1. The embossment hole location shall be measured from the sprocket hole controlling the location of the embossment. Dimensions of the embossment location and the hole location shall be applied independently of each other.
- 2. The tape with or without components shall pass around R without damage (see Figure 6.)
- 3. If S<sub>1</sub> < 1.0 mm, there may not be enough area for a cover tape to be properly applied (see EIA Standard 481, paragraph 4.3, section b.)
- 4.  $B_1$  dimension is a reference dimension for tape feeder clearance only.
- 5. The cavity defined by  $A_{\alpha}$ ,  $B_{\alpha}$  and  $K_{\alpha}$  shall surround the component with sufficient clearance that:
  - (a) the component does not protrude above the top surface of the carrier tape.
  - (b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
  - (c) rotation of the component is limited to 20° maximum for 8 and 12 mm tapes and 10° maximum for 16 mm tapes (see Figure 3.)
  - (d) lateral movement of the component is restricted to 0.5 mm maximum for 8 and 12 mm wide tape and to 1.0 mm maximum for 16 mm tape
  - (e) for KPS product,  $A_0$  and  $B_0$  are measured on a plane 0.3 mm above the bottom of the pocket.
  - (f) see addendum in EIA Standard 481 for standards relating to more precise taping requirements.



## Figure 2 - Punched (Paper) Carrier Tape Dimensions

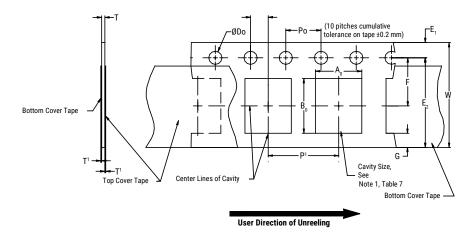

## **Table 7 - Punched (Paper) Carrier Tape Dimensions**

Metric will govern

Constant Dimensions — Millimeters (Inches)							
Tape Size	D <sub>0</sub>	E <sub>1</sub>	P <sub>0</sub>	P <sub>2</sub>	T <sub>1</sub> Maximum	G Minimum	R Reference Note 2
8 mm	1.5 +0.10 -0.0 (0.059 +0.004 -0.0)	1.75 ±0.10 (0.069 ±0.004)	4.0 ±0.10 (0.157 ±0.004)	2.0 ±0.05 (0.079 ±0.002)	0.10 (0.004) maximum	0.75 (0.030)	25 (0.984)
Variable Dimensions — Millimeters (Inches)							
Tape Size	Pitch	E2 Minimum	F	P <sub>1</sub>	T Maximum	W Maximum	$A_0B_0$
8 mm	Single (4 mm)	6.25 (0.246)	3.5 ±0.05 (0.138 ±0.002)	4.0 ±0.10 (0.157 ±0.004)	1.1 (0.043)	8.3 (0.327)	Note 1

- 1. The cavity defined by  $A_{\alpha}$ ,  $B_{\alpha}$  and T shall surround the component with sufficient clearance that:
  - a) the component does not protrude beyond either surface of the carrier tape.
  - b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been
  - c) rotation of the component is limited to 20° maximum (see Figure 3.)
  - d) lateral movement of the component is restricted to 0.5 mm maximum (see Figure 4.)
  - e) see addendum in EIA Standard 481 for standards relating to more precise taping requirements.
- 2. The tape with or without components shall pass around R without damage (see Figure 6.)



### **Packaging Information Performance Notes**

1. Cover Tape Break Force: 1.0 kg minimum.


2. Cover Tape Peel Strength: The total peel strength of the cover tape from the carrier tape shall be:


Tape Width	Peel Strength		
8 mm	0.1 to 1.0 newton (10 to 100 gf)		
12 and 16 mm	0.1 to 1.3 newton (10 to 130 gf)		

The direction of the pull shall be opposite the direction of the carrier tape travel. The pull angle of the carrier tape shall be 165° to 180° from the plane of the carrier tape. During peeling, the carrier and/or cover tape shall be pulled at a velocity of 300 ±10 mm/minute.


3. Labeling: Bar code labeling (standard or custom) shall be on the side of the reel opposite the sprocket holes. Refer to EIA Standards 556 and 624.

#### **Figure 3 – Maximum Component Rotation**

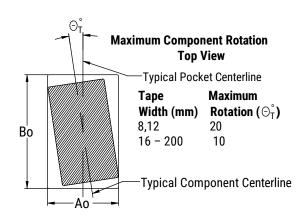

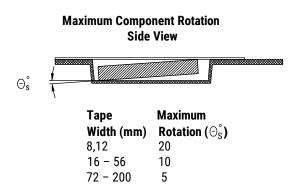

## Figure 4 - Maximum Lateral Movement

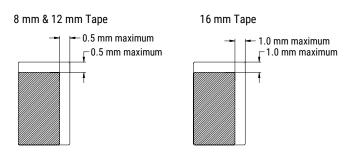

# Figure 5 - Bending Radius







Figure 6 - Reel Dimensions

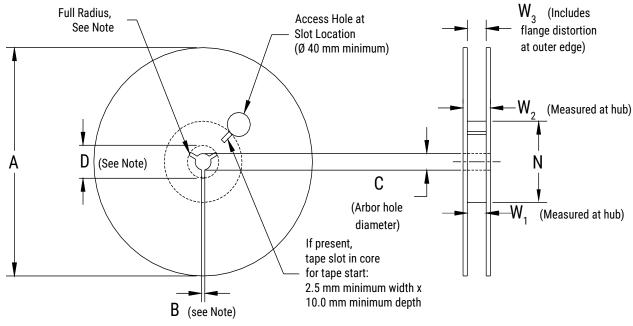

Note: Drive spokes optional; if used, dimensions B and D shall apply.


#### **Table 8 - Reel Dimensions**

Metric will govern


Constant Dimensions — Millimeters (Inches)									
Tape Size	A	B Minimum	С	D Minimum					
8 mm	178 ±0.20								
12 mm	(7.008 ±0.008) or	1.5 (0.059)	13.0 +0.5/-0.2 (0.521 +0.02/-0.008)	20.2 (0.795)					
16 mm	330 ±0.20 (13.000 ±0.008)								
	Variable Dimensions — Millimeters (Inches)								
Tape Size	N Minimum	$W_1$	W <sub>2</sub> Maximum	$W_3$					
8 mm		8.4 +1.5/-0.0 (0.331 +0.059/-0.0)	14.4 (0.567)						
12 mm	50 (1.969)	12.4 +2.0/-0.0 (0.488 +0.078/-0.0)	18.4 (0.724)	Shall accommodate tape width without interference					
16 mm		16.4 +2.0/-0.0 (0.646 +0.078/-0.0)	22.4 (0.882)						



## Figure 7 - Tape Leader & Trailer Dimensions

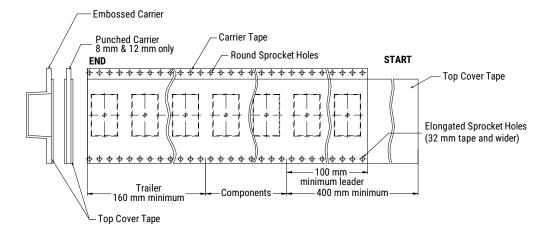

## Figure 8 - Maximum Camber

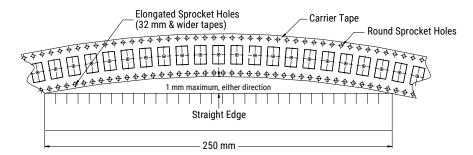



#### **KEMET Electronics Corporation Sales Offices**

For a complete list of our global sales offices, please visit www.kemet.com/sales.

#### **Disclaimer**

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.